

10/533914  
PCT/CA 03/01629  
22 DECEMBER 2003 22.12.03

PCT/CA03/1629

21 JAN 2004

PCT

PA 1092309

# THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

November 14, 2003

REC'D 21 JAN 2004

WIPO

PCT

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.

APPLICATION NUMBER: 10/294,563

FILING DATE: November 15, 2002

PRIORITY DOCUMENT  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)



By Authority of the  
COMMISSIONER OF PATENTS AND TRADEMARKS

*N. Williams*  
N. WILLIAMS  
Certifying Officer

BEST AVAILABLE COPY

11/15/02

11/15/02 U.S. PTO

11/15/02 U.S. PTO

Please type a plus sign (+) inside this box → ☒

PTO/SB/05 (03-01)

Approved for use through 10/31/2002. OMB 0651-0032

U.S. Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

**UTILITY  
PATENT APPLICATION  
TRANSMITTAL**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

93177pus

First Inventor

Gary Haughton

Title

MIXING APPARATUS

Express Mail Label No.

**APPLICATION ELEMENTS**

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents  
Box Patent Application  
Washington, D.C. 20231

- 1.
- ☒
- Fee Transmittal Form (e.g., PTO/SB/17)
- 
- (Submit an original, and a duplicate for fee processing)

- 2.
- ☐
- Applicant claims small entity status.
- 
- See 37 CFR 1.27.

- 3.
- ☒
- Specification [Total Pages
- 39**
- ]
- 
- (preferred arrangement set forth below)

- Descriptive title of the invention
- Cross Reference to Related Applications
- Statement Regarding Fed sponsored R & D
- Reference to sequence listing, a table, or a computer program listing appendix
- Background of the Invention
- Brief Summary of the Invention
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claim(s)
- Abstract of the Disclosure

- 4.
- ☒
- Drawing(s) (35 U.S.C. 113) [Total Sheets
- 17**
- ]

5. Oath or Declaration [Total Pages
- 56**
- ]

- a. ☐ Newly executed (original or copy)
- b. ☐ Copy from a prior application (37 CFR 1.63(d))  
(for continuation/divisional with Box 18 completed)

- i. ☐ **DELETION OF INVENTOR(S)**  
Signed statement attached deleting inventor(s)  
named in the prior application, see 37 CFR  
1.63(d)(2) and 1.33(b).

- 6.
- ☒
- Application Data Sheet. See 37 CFR 1.76

- 7.
- ☐
- CD-ROM or CD-R in duplicate, large table or
- 
- Computer Program (Appendix)

8. Nucleotide and/or Amino Acid Sequence Submission
- 
- (if applicable, all necessary)

- a. ☐ Computer Readable Form (CRF)
- b. Specification Sequence Listing on:
- i. ☐ CD-ROM or CD-R (2 copies); or
  - ii. ☐ paper
- c. ☐ Statements verifying identity of above copies

**ACCOMPANYING APPLICATION PARTS**

9. ☐ Assignment Papers (cover sheet & document(s))
10. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney  
(when there is an assignee)
11. ☐ English Translation Document (if applicable)
12. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
13. ☐ Preliminary Amendment
14. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
15. ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)
16. ☐ Nonpublication Request under 35 U.S.C. 122  
(b)(2)(B)(i). Applicant must attach form PTO/SB/35  
or its equivalent.
17. ☒ Other: Money Order  
Power of Attorney (3x)

18. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment, or in an Application Data Sheet under 37 CFR 1.76:

☐ Continuation ☐ Divisional ☒ Continuation-in-part (CIP) of prior application No.: **PCT/CA 02/00528**

Prior application information: Examiner

Group / Art Unit:

For CONTINUATION OR DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 5b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

**19. CORRESPONDENCE ADDRESS**☒ Customer Number or Bar Code Labelor ☐ Correspondence address below

Name

06431

PATENT TRADEMARK OFFICE

Address

City

State

Zip Code

Country

Telephone

Fax

Name (Print/Type) Patrick J. Hofbauer

Registration No. (Attorney/Agent)

32,336

Signature

Date

November 14, 2002

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

# FEE TRANSMITTAL for FY 2002

Patent fees are subject to annual revision

☐ Applicant claims small entity status. See 37 CFR 1.27

TOTAL AMOUNT OF PAYMENT \$848.00

## Complete if Known

Application Number n/a  
Filing Date n/a  
First Named Inventor Gary Haughton  
Examiner Name n/a  
Group Art Unit n/a  
Attorney Docket No. 93177pus

## METHOD OF PAYMENT (check all that apply)

☐ Check ☐ Credit card ☒ Money ☐ Other ☐ None

☒ Deposit Account

Deposit  
Account  
Number

08-2460

Deposit  
Account  
Name

Patrick J. Hofbauer

The Commissioner is authorized to: (check all that apply)

☐ Charge fee(s) indicated below ☒ Credit any overpayments

☒ Charge any additional fee(s) during the pendency of this application

☐ Charge fee(s) indicated below, except for the filing fee to the above identified deposit account

## FEE CALCULATION

### 1. BASIC FILING FEE

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid
101 740	201 370	Utility filing fee	740.00
106 330	206 165	Design filing fee	
107 510	207 255	Plant filing fee	
108 740	208 370	Reissue filing fee	
114 180	214 80	Provisional filing fee	
SUBTOTAL (1)			\$740.00

### 2. EXTRA CLAIM FEES FOR UTILITY AND

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid
103 18	203 9	Claims in excess of 20	
102 84	202 42	Independent claims in excess of 3	
104 280	204 140	Multiple dependent claim, if not paid	
109 84	209 42	** Reissue independent claims over original patent	
110 18	210 9	** Reissue claims in excess of 20 and over original patent	
SUBTOTAL (2)			\$108.00

\*\*or number previously paid, if greater; For Reissues, see above

## FEE CALCULATION (continued)

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid
105 130	205 65	Surcharge - late filing fee or oath	
127 50	227 25	Surcharge - late provisional filing fee or cover sheet	
139 130	139 130	Non - English specification	
147 2,520	147 2,620	For filing a request for <i>ex parte</i> reexamination	
112 920*	112 920*	Requesting publication of SIR prior to Examiner action	
113 1,840*	113 1,840*	Requesting publication of SIR after Examiner action	
115 110	215 55	Extension for reply within first month	
116 400	216 200	Extension for reply within second month	
117 920	217 460	Extension for reply within third month	
118 1,440	218 720	Extension for reply within fourth month	
128 1,960	228 980	Extension for reply within fifth month	
119 320	219 160	Notice of Appeal	
120 320	220 160	Filing a brief in support of an appeal	
121 280	221 140	Request for oral hearing	
138 1,510	138 1,510	Petition to institute a public use proceeding	
140 110	240 55	Petition to revive - unavoidable	
141 1,280	241 640	Petition to revive - unintentional	
142 1,280	242 640	Utility issue fee (or reissue)	
143 460	243 230	Design issue fee	
144 620	244 310	Plant issue fee	
122 130	122 130	Petitions to the Commissioner	
123 50	123 50	Processing fee under 37 CFR § 1.17(q)	
126 180	126 180	Submission of Information Disclosure Statement	
581 40	581 40	Recording each patent assignment per property (times number of properties)	
148 740	246 370	Filing a submission after final rejection (37 CFR § 1.129(a))	
149 740	249 370	For each additional invention to be examined (37 CFR § 1.129(b))	
179 740	279 370	Request for Continued Examination (RCE)	
169 900	169 900	Request for expedited examination of a design application	

Other fee (specify) \_\_\_\_\_

\*Reduced by Basic Filing Fee Paid

SUBTOTAL (3)

## SUBMITTED BY

Name Patrick J. Hofbauer

Registration No  
(Attorney/Agent)

32,336

## Complete if applicable

Telephone

(905) 634-0040

Signature

Date

November 14, 2002

**WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on**

Burden Hour Statement. This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

U.S. PATENT APPLICATION DATA SHEET**Application Information**

Application Type::	Regular
Subject Matter::	Utility
CD-ROM or CD-R?::	None
Title::	MIXING APPARATUS
Attorney Docket Number::	93177pus
Request for Early Publication?::	No
Request for Non-Publication?::	No
Suggested Drawing Figure::	2
Total Drawing Sheets::	17
Small Entity::	No
Petition Included?::	No
Petition Type::	N/a
Secrecy Order in Parent Application?::	No

**Inventor Information**

Inventor Authority Type::	Inventor
Primary Citizenship Country::	Canada
Status::	Full Capacity
Given Name::	Gary

Middle Name::

Family Name:: Haughton

City of Residence:: Oakville

Country of Residence:: Canada

Street:: 2099 Marine Drive

City:: Oakville

State or Province:: Ontario

Postal or Zip Code:: L6L 1B8

Inventor Authority Type:: Inventor.

Primary Citizenship Country:: Canada

Status:: Full Capacity

Given Name:: Martin

Middle Name::

Family Name:: Behr

City of Residence:: Oakville

Country of Residence:: Canada

Street:: 2086 Rosemount Crescent

City:: Oakville

State or Province:: Ontario

Postal or Zip Code:: L6M 3P6

Inventor Authority Type:: Inventor  
Primary Citizenship Country:: Canada  
Status:: Full Capacity  
Given Name:: Tom  
Middle Name::  
Family Name:: Ostrowski  
City of Residence:: Mississauga  
Country of Residence:: Canada  
Street:: 4168 Highgate Crescent  
City:: Mississauga  
State or Province:: Ontario  
Postal or Zip Code:: L4W 3H1

**Correspondence Information**

Correspondence Customer Number:: 006431



# **Representative Information**

Representative Customer Number:: 006431



# **Domestic Priority Information**

Application:: Continuity Type:: Parent Application:: Parent Filing Date::

This Application Continuation-in-part PCT/CA02/00528 April 17, 2002

# **Foreign Priority Information**

Country:: Application Number:: Filing Date::

Canada 2,390,502 June 12, 2002

# **Section 119(e) Priority Information**

This application claims the benefit of United States Provisional Patent Application No. \_\_\_\_\_, entitled \_\_\_\_\_, filed \_\_\_\_\_.

**Assignee Information**

Assignee Name::

Street::

City::

State or Province::

Country::

Postal or Zip Code::



1023453 .1.1.1502

UNITED STATES

TITLE: MIXING APPARATUS

INVENTORS: GARY HAUGHTON  
MARTIN BEHR  
TOM OSTROWSKI

## FIELD OF THE INVENTION

[0001] The present invention generally relates to the field of mineral ore processing, and more particularly, to a mixing apparatus and to uses thereof in the separation of minerals from mineral-bearing ores.

## BACKGROUND OF THE INVENTION

[0002] Processes are known in the prior art which provide for the separation of minerals from mineral-bearing ores.

[0003] For example, in known processes used for the separation of copper from copper-bearing ores, illustrated diagrammatically in Figure 1, non-oxidized ores 20 (which might contain as little as 0.5% copper, and typically contain iron sulfides) are processed in a crusher 22, with water 24, to form a slurry 26. The slurry 26 is then transferred to a flotation cell 28, and subjected to physical action, specifically, air sparging and mixing. As a result of the physical action, a substantial portion of the copper value in the slurry 26 rises to the surface of the flotation cell 28 as a froth 30, and is skimmed therefrom by a paddle mechanism 32, while the waste rock 33 ("gangue") remains in the bulk, and is ultimately passed from the cell 28 to a dryer 34 and discharged as tailings 36. This process of "froth separation" results from differences in wettability of copper as compared to other minerals, and is typically aided by chemical frothing and collector agents 38 added to the slurry 26, such

that the froth 30 from such flotation contains 27 to 36% copper. Methylisobutyl carbonal (MIBC) is a typical frothing agent, and sodium xanthate, fuel oil, and VS M8 (a proprietary formulation) are typical collector agents.


[0004] The froth 30 is then fed to an oxygen smelter 40, and the copper and iron sulfides are oxidized at high temperature resulting in impure molten metal 42 (97 - 99%, copper, with significant amounts of iron oxide) and gaseous sulfur dioxide 44. The impure metal 42 is then transferred to an electrolytic purification unit 46, which separates the impure metal 42 into 99.99% purity copper material 48 and slag 50.

[0005] The gaseous sulfur dioxide 44 is collected in a reactor 52 wherein it is scrubber and mixed with water 24 to form sulphuric acid 54. The sulphuric acid 54 is suitably blended with water 24 and used to leach oxidized ores, typically by "heap leaching" an ore pile 56. The resultant copper-bearing acid 58 is known as "pregnant leach solution". Pregnant leach solution 58 is also obtained by mixing solutions of sulphuric acid 54, in vats 60, with the tailings 36 discharged from flotation operations, to dissolve the trace amounts of copper remaining therein.

[0006] The copper is "extracted" from the pregnant leachate 58 by mixing therewith, in a primary extraction step 62, organic solvent 64 (often kerosene) in which copper metal preferentially dissolves. Organic chemical chelators 66, which bind solubilized

copper but not impurity metals, such as iron, are also often provided with the organic solvent, to further drive the migration of copper. Hydroxyoximes are exemplary in this regard.

[0007] In the primary extraction step 62, the copper is preferentially extracted into the organic phase according to the formula:



where HR = copper extractant (chelator)



[0008] The mixed phases are permitted to separate, into a copper-laden organic solvent 68 and a depleted leachate 70.

[0009] The depleted leachate 70 is then contacted with additional organic solvent 72 in a secondary extraction step 74, in the manner previously discussed, and allowed to settle, whereupon the phases separate into a lightly-loaded organic (which is recycled as solvent 64 in the primary extraction step) and a barren leachate or raffinate 76.

[0010] The barren leachate 76 is delivered to a coalescer 78 to remove therefrom entrained organics 80, which are recycled into the system; the thus-conditioned leachate 82 is then suitable for recycling into the leaching system.

[0011] The pregnant organic mixture 68 (produced in the primary extraction step 62) is stripped of its copper in a stripping operation 84 by the addition of an aqueous stripping solution of higher acidity 86 (to reverse the previous equation); after phase separation, a loaded electrolytic solution 88 ("rich electrolyte") remains, as well as an organic solvent, the latter being recycled as solvent 72 in the secondary extraction 74.

[0012] The rich electrolyte 88 is directed to an electrowinning unit 90. Electrowinning consists of the plating of solubilized copper onto the cathode and the evolution of oxygen at the anode. The chemical reactions involved with these processes are shown below



[0013] This process results in copper metal 92, and a lean (copper-poor) electrolyte, which is recycled as stripping solution 86.

[0014] The combination of leaching, combined with extraction and electrowinning, is commonly known in the art as solvent extraction electrowinning, hereinafter referred to in this specification and in the claims as "SXEW".

[0015] In a known application of the described SXEW process, in both the primary 62 and secondary 74 extraction steps, the combined organic and aqueous phases are delivered through a series of mixing vessels (primary P, second S and tertiary T), and then to a settling tank ST, the primary mixing vessel P being about 8 feet in diameter and 12 feet in height, and stirred by a rotary mixer driven by a 20 horsepower motor, and each of the secondary S and tertiary T mixing vessels being about 12 feet in diameter and height, and stirred by a rotary mixer driven by a 7.5 horsepower motor. (The system of primary P, secondary S and tertiary T mixers, and settling tank ST, is replicated to meet volume flow requirements, with each system processing about 10,000 gpm). This provides a mixing regime wherein the organic and aqueous phases are intimately mixed for a period of time sufficient to allow copper exchange (to maximize copper recovery), yet relatively quickly separate substantially into organic and aqueous phases.

[0016] In a known application of the froth flotation process, a plurality of flotation cells 28, each being approximately 5 feet square and 4 feet high, are utilized, with pairs of cells sharing a 50 horsepower motor driving respecting rotary mixers (not shown). This provides a mixing regime sufficient to allow the air bubbles to carry the copper value to the surface.

[0017] Various modifications can be made to the rotary mixers in the extractors and in the flotation tanks of the foregoing process. However, the general configurations noted above have been found to provide relatively economical results, and significant variations therefrom can impact adversely upon economies. For example, an attempt to reduce energy costs by scaling-down the motors for the mixers would have consequent impacts either upon the copper recovery efficiency, or upon available process throughputs. Specifically, the relatively large motors employed are required to drive the sturdy (and therefore heavy) rotary mixers and shafts that are needed to withstand the torques caused by rotation; lower power motors would demand either lower blade speed or smaller blades, with consequent impacts upon mixing and transfer efficiency.

#### SUMMARY OF THE INVENTION

[0018] It is an object of the present invention to provide a novel mixing apparatus.

[0019] This object is met by the present invention which comprises a mixing apparatus. The mixing apparatus is advantageously used with a vessel having a contiguous sidewall centered about and defining a longitudinal axis.

[0020] As one aspect of the present invention, the mixing apparatus comprises a mixing head having a tubular blade portion centered about and defining a head axis and having a first tube end and a second tube end spaced-apart from one another therealong.

[0021] The blade portion tapers from the first tube end to the second tube end with the inner surface of the blade portion and the second end defining an inside blade diameter "ID" and the outer surface of the blade portion and the first end defining an outer blade diameter "OD". The mixing apparatus further comprises mounting means for mounting the mixing head substantially coaxial to and within the vessel for longitudinal movement relative thereto. Also provided is a reciprocating means for effecting said longitudinal relative movement of the mixing head in a reciprocating manner through a stroke length "S", with a duration "T" for each cycle, wherein  $175 \leq 0.36 \times OD^2/ID^2 \times S/T \leq 250$  when OD, ID and S are each expressed in inches, and T is expressed in minutes.

[0022] As other aspects of the invention, the blade portion preferably tapers in a substantially frustoconical manner from the first tube end to the second tube end, and an angle  $\alpha$ , defined by the angle between the pair of axes defined by and coincident with the intersections of the outer surface of the blade portion and a plane coincident with the head axis, preferably lies between  $90^\circ$  and  $180^\circ$ .



[0023] As other aspects of the present invention, the mounting means preferably comprises a mixer shaft. The mixer shaft has a bottom end operatively rigidly connected to the mixing head by a hub member rigidly connected to the bottom end of the mixer shaft and a plurality of support webs extending between and connecting the hub member and the blade portion, and extends from said bottom end, substantially parallel to the head axis, to a top end which is disposed above the vessel in use.

[0024] As yet another aspect of the present invention, the reciprocating means preferably comprises shaft gripping means for gripping the mixer shaft adjacent the top end thereof and effects longitudinal reciprocating movement of the shaft gripping means through stroke length "S" with duration "T" for each cycle, thereby to effect longitudinal movement of the mixing head in said reciprocating manner.

[0025] As another aspect of the present invention, a housing, positionable above said vessel, is preferably provided, and the reciprocating means preferably comprises a flywheel, a crank member, and a yoke.

[0026] The flywheel is mounted to the housing for rotation about a rotational axis which is normal to the longitudinal axis.

[0027] The crank member projects from the flywheel in a direction parallel to the rotational axis and is connected to the flywheel for rotation therewith.

[0028] The yoke is displaced from the flywheel in the direction of the crank member and has a substantially linear race formed therein which is in receipt of the crank member and is adapted to permit relative translational movement of the crank member and the yoke.

[0029] The yoke is positioned with the race arranged normal to the rotation axis and bisected thereby and is mounted to the housing in a manner which constrains movement of the yoke otherwise than along an axis parallel to the longitudinal axis and normal to the rotational axis, such that during rotation of the flywheel, the crank member imparts longitudinal reciprocating movement to the yoke.

[0030] As yet another aspect of the invention, the shaft gripping means is preferably operatively rigidly connected to the yoke for longitudinal reciprocating movement therewith.

[0031] As another aspect of the present invention, the mounting means is preferably adapted to mount the mixing head within the vessel with the first tube end disposed above the second tube end.

[0032] The invention also comprises use of the mixing apparatus as a mixer for a vessel in an SXEW extractor unit, and as a mixer for the vessel in a froth flotation cell.

[0033] Other advantages, features and characteristics of the present invention, as well as methods of operation and functions of the related elements of the structure, and the combination of parts and economies of manufacture, will become more apparent upon consideration of the following detailed description and the appended claims with reference to the accompanying drawings, the latter of which is briefly described hereinbelow.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0034] The novel features which are believed to be characteristic of the according to the present invention, as to its structure, organization, use and method of operation, together with further objectives and advantages thereof, will be better understood from the following drawings in which a presently preferred embodiment of the invention will now be illustrated by way of example. It is expressly understood, however, that the drawings are for the purpose of illustration and description only, and are not intended as a definition of the limits of the invention. In the accompanying drawings:

[0035] Figure 1 is a diagrammatic representation of processes for copper extraction of the prior art.

[0036] Figure 2 is a front, top, left side perspective view of a mixing apparatus according to a preferred embodiment of the present invention, in a preferred use.

[0037] Figure 3 is a left side cross-sectional view of the structure of Figure 2.

[0038] Figure 4 is a front, top right side perspective view of the reciprocating means and mounting means of the mixing apparatus of Figure 2.

[0039] Figure 5 is an exploded perspective view of a part of the structure of Figure 4.

[0040] Figure 6A is a front elevational view of the structure of Figure 4, with the mixer shaft and shaft gripping means removed for clarity.

[0041] Figure 6B is a view similar to Figure 6A, with, inter alia, the flywheel displaced 90° counter-clockwise relative to its position in Figure 6A.

[0042] Figure 6C is a view similar to Figure 6A, with, inter alia, the flywheel displaced 90° counter-clockwise relative to its position in Figure 6B.

[0043] Figure 6D is a view similar to Figure 6A, with, inter alia, the flywheel displaced 90° counter-clockwise relative to its position in Figure 6C.

[0044] Figure 7 is a front, top, left side perspective view of the mixing head of the structure of Figure 2.

[0045] Figure 8 is a rear, bottom, right side perspective view of the mixing head of the structure of Figure 2.

[0046] Figure 9 is a bottom view of the mixing head illustrated in Figure 2.

[0047] Figure 10 is a left side view of the mixing head of Figure 2.

[0048] Figure 11 is a view of an alternate embodiment of the support webs of the invention, which view corresponds to the area circumscribed by circle 11 in Figure 7.

[0049] Figure 12 is a view of an alternate embodiment of the blade portion of the present invention, which view corresponds to the area circumscribed by circle 12 in Figure 7.

[0050] Figure 13 is a view similar to Figure 12, showing a further embodiment of the blade portion of the invention.

[0051] Figure 14 is a front, top, left side perspective view of a mixing apparatus according to the preferred embodiment of the invention in an alternate use.

[0052] Figure 15 is a left side cross-sectional view of the structure of Figure 14.

[0053] Figure 16 is a view similar to Figure 3, illustrating the mixing apparatus according to an alternative embodiment in a further alternative use.

[0054] Figure 17 is a partially exploded view similar to Figure 4, showing a first alternate mounting means and a first alternate shaft gripping means.

[0055] Figure 18 is a sectional view, along sight line 18-18 of Figure 17, with the apparatus fully assembled.

[0056] Figure 19 is a partially exploded perspective view of a second alternate mounting means and a second alternate shafting gripping means.

[0057] Figure 20 is a perspective view of the second alternate mounting means and the second alternate shaft gripping means, with the apparatus fully assembled.

## DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT

[0058] Referring now to Figure 2 of the drawings, a mixing apparatus, according to a preferred embodiment of the present invention and designated with general reference numeral 100, is shown in use, in a manner fully described in following paragraphs, with a vessel 102 having a contiguous sidewall 104 centered about and defining a longitudinal axis A-A.

[0059] Full details of the preferred mixing apparatus of the present invention will be set out in following paragraphs. However, for greater clarity, it should firstly be understood, generally, that the mixing apparatus 100 comprises a mixing head 106 having a head axis H-H (illustrated in Figures 3, 7 and 8); mounting means for mounting the mixing head 106 substantially coaxial to and within the vessel 102 for longitudinal movement relative to the head axis H-H, said mounting means being designated with general reference numeral 108 in Figure 2; and reciprocating means, designated with general reference numeral 110, for effecting said longitudinal relative movement of the mixing head 106 in a reciprocating manner.

[0060] The various parts of this preferred mixing apparatus will now be described with more particularity.

[0061] With reference to Figure 7, the mixing head 106 will be seen to include a blade portion 112, a hub member 114 and a plurality of support webs 116.

[0062] The blade portion 112, as shown, is constructed from six arcuate segments 118. The segments 118 are arranged in tubular relation so as to form a first tube end 120 and a second tube end 122, illustrated in Figure 10, and are secured, by bolts (not shown), to one another through flanges 124 (see Figures 7, 8 and 9) provided at the ends of each segment 118 for this purpose.

[0063] The tubular blade portion 112 defines and is centered about the head axis H-H, such that the first tube end 120 and the second tube end 122 of the blade portion 112 are spaced-apart from one another therealong, and the blade portion 112 tapers in a substantially frustoconical manner from the first tube end 120 to the second tube end 122.

[0064] The rate of taper is such that the angle  $\alpha$ , defined by the angle between the pair of axes X,X and Y,Y, which axes are defined by and coincident with the intersections of the outer surface 128 of the blade portion 112 and a plane P-P coincident with the head axis, lies between  $90^\circ$  and  $180^\circ$  ( $90^\circ \leq \alpha \leq 180^\circ$ ), as indicated in Figure 9 and Figure 10.



[0065] The hub member 114 is also tubular, and is centrally disposed adjacent to the blade portion 112.

[0066] The plurality of, specifically, three, support webs 116 each extend between and connect the hub member 114 and the blade portion 112. Such connection is effected by rivets or bolts (not shown).

[0067] With reference now to Figure 3, the preferred mounting means 108 will be seen to comprise a mixer shaft 130 and a linear bearing 132.

[0068] The mixer shaft 130 has a bottom end 134 operatively rigidly connected to the mixing head 106 and extends from said bottom end 134, substantially coincident with the head axis H-H, to a top end 136 which is disposed above the vessel 102 in use. Such rigid connection of the mixer shaft 130 and the mixing head 106 may be effected by, for example, threading the exterior of the bottom end of the mixer shaft, and providing a corresponding thread on the interior of the hub member (not shown).

[0069] The linear bearing 132 supports the mixer shaft 130 for longitudinal movement; this is effected in the preferred embodiment by mounting the bearing 132 to a housing 138 which is itself mounted, as illustrated in Figure 2, to a frame 140 which, in the preferred embodiment shown, spans over the vessel 102.

[0070] As best illustrated in Figure 4, the reciprocating means 110 comprises a shaft gripping means, designated with the general reference numeral 142, for gripping the mixer shaft 130 adjacent its top end 136 and for effecting longitudinal reciprocating movement of the shaft 130 through stroke length "S" with duration "T" for each cycle, thereby to effect coincident longitudinal movement of the mixing head 106 in said reciprocating manner through the same stroke length "S", as indicated in Figure 3, wherein the mixing head 106 is shown in blackline in a starting position, and in phantom outline, at a position longitudinally displaced from the starting position through a distance "S".

[0071] Such reciprocating movement is effected through a scotch yoke apparatus 144, comprising a flywheel 146, a drive means 148, a crank member 150 and a yoke 152, illustrated in Figure 4 and in Figure 5.

[0072] The flywheel 146 is mounted to the housing 138 for rotation about a rotational axis R-R (illustrated in Figure 4) which is normal to the longitudinal axis A-A.

[0073] The drive means 148 is for driving rotation of the flywheel 146 and, in the preferred embodiment illustrated, comprises an explosion-proof electric motor, operatively connected by its drive shaft (not shown) to the flywheel 146.

[0074] The crank member 150 projects from the flywheel 146 in a direction parallel to the rotational axis R-R and is connected to the flywheel 146 for rotation therewith.

[0075] The yoke 152 is displaced from the flywheel 146 in the direction of the crank member 150 and has formed therein a substantially linear race 154 which is in receipt of the crank member 150 and is adapted to permit relative translational movement of the crank member 150 and the yoke 152 as the flywheel 146 rotates.

[0076] The yoke 152 has threaded, coaxial bores 156 disposed on its upper and lower surfaces to receive respective threaded guide shafts 158. Corresponding guide bearings 160 are provided on the housing 138. When the yoke 152 is operatively mounted with the guide shafts 158 disposed within the guide bearings 160, the yoke 152 is positioned with the race 154 arranged normal to the rotation axis R-R and bisected thereby, and is mounted to the housing 138 in a manner which constrains movement of yoke 152 otherwise than along an axis B-B parallel to the longitudinal axis A-A and normal to the rotational axis R-R (best indicated in Figure 4), such that during rotation of the flywheel 146, the crank member 150 imparts longitudinal reciprocating movement to the yoke 152, as indicated by the sequence of Figures 6A-6D.

[0077] The length of the resultant stroke may be selected by suitable adjustment to the radial position of the crank member 150 (that is, the distance between the crank member 150 and the rotation axis R-R); for this reason, the crank member 150 is threaded, and a plurality of threaded sockets 162 are provided in a radial array on the face of the flywheel 146, as illustrated in Figure 5. The duration of each stroke may be selected by suitable adjustment to the rotational speed of the electric motor 148.

[0078] In the preferred embodiment, the yoke moves through a stroke length "S", with a duration "T" for each cycle, wherein  $175 \leq 0.36 \times OD^2/ID^2 \times S/T \leq 250$  when T is expressed in minutes, S is expressed in inches, "ID" is an inside blade diameter, expressed in inches and defined by the inner surface 126 of the blade portion 112 and the second tube end 122, and "OD" is an outside blade diameter, expressed in inches and defined by the outer surface 128 of the blade portion 112 and the first tube end 120, as indicated in Figure 10.

[0079] Returning to Figures 4 and 5, the shaft gripping means 142 preferably comprises a clamp 163, specifically, a pair of mating clamping blocks 164, each having a concave groove 166 of semi-circular cross-section formed therein to grippingly receive the mixer shaft 130. Clamp 163 is selectively rigidly affixed, by bolts 168, to the yoke 152, such that longitudinal reciprocating movement is imparted to the shaft gripping means 142 by said longitudinal reciprocating movement of the yoke 152.

[0080] This clamp arrangement permits the relative depth of the mixing head 106 in the vessel 102 to be conveniently adjusted from above; the clamp 163 need only be loosed, by disengaging the associated bolts 168, whereupon mixer shaft 130 can be raised or lowered as desired, and bolts 168 re-engaged.

[0081] The mixer shaft 130 is itself preferably constructed of a plurality of tube segments 170, threaded at their ends and joined to one-another in end-to-end relation by threaded couplings 172, so that segments 170 can be added or removed as desired, thereby to permit the aforementioned adjustment feature to be more conveniently and fully exploited.

[0082] With general reference to Figure 4 and Figure 5, stresses created on the yoke 152, by virtue of its carriage of the shaft gripping means 142, are preferably countered by the provision of a balancing shaft 174, rigidly connected to the housing 138 to extend substantially parallel to longitudinal axis A-A, and by a pair of mating linear bearing blocks 176, each having a respective groove 178 of semi-circular cross-section formed therein sheathed with a self-lubricating material such as polytetrafluorethylene, which are mounted to the yoke 152 by bolts 180 and slidably receive the balancing shaft 174 therethrough.

[0083] It has been found that the present invention can be used to great advantage as a mixer for a vessel in a SXEW extractor unit, as illustrated in Figures 2 and 3.

## EXAMPLE 1

[0084] In the known application of the SXEW process previously described, samples were taken from the outfall of each of the primary vessel; secondary vessel; tertiary vessel and settling tank of a respective secondary extraction unit (A) and permitted to separate.

[0085] In a parallel secondary extraction unit (B) (ie processing a pregnant leachate of substantially identical composition), a mixing apparatus in accordance with the present invention (OD=60; ID=48;  $\alpha=120$  ; S=10; T=.0333, driven by a 2hp motor) was substituted for the rotary mixer in the secondary mixing vessel, and samples were again taken from the outfall from each of the primary, second and tertiary mixing vessels, and from the settling tank, and permitted to separate.

[0086] Copper concentration (g/l) was measured in the organic component of each sample, as follows:

	(A)	(B) 30 cpm
	Cu(g/l)	Cu (g/l)
Primary mixing vessel	2.01	2.01
Secondary mixing vessel	2.06	2.06
Tertiary mixing vessel	2.12	2.13
Settling tank	2.14	2.13

[0087] As would be expected, copper concentration from the primary mixing vessel in each of the A and B lines is similar (because to that point in the process, mixing is provided by identical rotary mixers). However, unexpectedly, copper concentrations in the outfall from the secondary mixers also remained identical, and copper concentration in the outfall from the settling tanks remained quite similar, despite the almost 75% reduction in energy input (2 hp drive motor for the reciprocating mixer, as compared to the 7.5 hp motor driving the rotary mixer).

[0088] EXAMPLE 2

[0089] In a second test, the B line of Example 1 was modified by altering the motor speed of the mixer of the present invention, such that it operated at 45 cycles/minute ( $T=.0222$ ).

[0090] Copper concentration (g/l) was again measured, as follows:

	(B) [45cpm]
	Cu(g/l)
Primary mixing vessel	2.00
Secondary mixing vessel	2.08
Tertiary mixing vessel.	2.11
Settling tank	2.16

[0091] Again, as would be expected, copper concentration from the primary mixing vessel in the B line remained similar to that obtained in the A line (because to that point in the process, mixing is provided by identical rotary mixers). However, unexpectedly, copper concentrations in the outfall from the settling tank from the modified B line showed significant improvement over the A line results (copper recovery improved from 2.14 g/l to 2.16 g/l).

[0092] Without intending to be bound by theory, it is believed the mixing apparatus of the present invention provides mixing currents which [at least in the context of the liquids utilized in SXEW copper extraction, in a vessel having an internal diameter D and a height H, wherein OD:D is between about 1:2.5 to 1:4, ID:OD is between about 1:0 to 1.5; and D:H is approximately 1:1] create a dispersion characterized by consistent-sized droplets, uniformly distributed throughout the mixing vessel, whereas in a rotary mixer, there is a wide variation in drop sizes, and in the distribution of said drops, (perhaps due to the fact that the blade in a rotary mixer moves at different speeds along its length). This uniform dispersion is believed to provide an environment amenable to efficient mass transfer between phases, while at the same time providing for substantial disengagement of the mixed phases within a relatively short time frame.



[0093] Whereas the illustrations depict an embodiment of the present invention which is preferred, various modifications are contemplated.

[0094] One such modification, which is depicted in Figure 17 and in Figure 18, relates to a modification of the mounting means 108 and the shaft gripping means 142. Specifically, in this structure, an alternate shaft gripping means 142' is depicted, as is an alternate mounting means 108' which includes a linear bearing assembly 232 supporting the mixer shaft 130, in use, for longitudinal movement, the linear bearing assembly 232 so supporting the mixer shaft 130 at a first location, relatively proximal to the shaft gripping means 142', and at a second location, disposed downwardly from the first location and relatively distal to the shaft gripping means 142'.

[0095] The alternate shaft gripping means 142' comprises a clamp 163', specifically, a pair of mating clamping blocks 164,164' each having a concave groove 166 of semi-circular cross-section formed therein. Clamping block 164' is secured by bolts 230 to the yoke 152, such that longitudinal reciprocating movement is imparted to clamping block 164' by said longitudinal reciprocating movement of the yoke 152. Clamping block 164 is secured by bolts 168 to clamping block 164', with the grooves 166,166 thereof in opposed relation, to grippingly receive therewithin the mixer shaft 130 and impart longitudinal reciprocating movement thereto by said longitudinal reciprocating movement of the yoke 152.

[0096] The linear bearing assembly 232 includes a bushing 202 formed of mating bushing blocks 200,200'. Each bushing block 200,200' has a concave groove 204 of semi-circular cross-section formed therein, said groove 204 being sheathed with an arcuate pad 220 of self-lubricating material such as polytetrafluorethylene. The bushing 202 supports the mixer shaft 130, at the aforementioned first location, for longitudinal movement; this is effected in the alternate preferred embodiment shown by securely mounting bushing block 200' to the housing 138 and providing for the secure attachment of the bushing blocks 200',200 to one another by bolts 206, with the grooves 204,204 thereof in opposed relation, to slidably receive within pads 220,220 said mixer shaft 130. As shown, pads 220,220 are preferably ribbed.

[0097] The linear bearing assembly 232 further includes a linear bearing 214 composed of a plurality of rollers 212,212,212' arranged in a pair of mating roller subassemblies 242,242'. A tubular fixed support 208, which depends downwardly from the housing 138, is provided, and, towards the bottom extent thereof, has roller subassembly 242 mounted thereto by bolts 222,222. A pair of removable supports 210,210 are also provided. The removable supports 210,210 are securely attached to bushing block 200 and depend downwardly therefrom to a terminus 228.

[0098] Roller subassembly 242', including roller 212', is secured to supports 210,210 adjacent their terminus 228 by bolts 222,222, such that, in use, when bushing blocks 200,200' are operably secured to one another, rollers 212,212,212' circumferentially surround mixer shaft 130, as shown in Figure 18, at a position beneath and longitudinally spaced from bushing 202, so as to support said mixer shaft 130 at said second location, thereby limiting flexure, while at the same time permitting longitudinal movement thereof.

[0099] It will be evident that the foregoing defines, in the linear bearing assembly 232, a first portion (formed of the bushing block 200', the tubular support 208, and roller subassembly 242) designated with general reference numeral 234 securely attached to the housing 138 and disposed to one side of the mixer shaft 130 in use, as well as a second portion (formed of bushing block 200, supports 210,210 and roller subassembly 242'), designated with general reference number 236, which is disposed to the other side of the mixer shaft 130 in use and is operatively removably secured to the housing 138 to permit, when removed, removal and replacement of the mixer shaft 130. A slot 224 is conveniently provided in the housing 138, to provide clearance for the mixer shaft 130.

[00100] Merely by removing bolts 168 in clamping block 164 and bolts 206 in bushing block 200, the clamping block 164 and the second portion 236 may be removed, whereupon mixer shaft 130 may be removed, for servicing or the like.

[00101] To facilitate handling of the mixer shaft 130, same is formed with an upper enlarged end portion 216, in which is provided a threaded bore 218, to receive a threaded lifting lug (not shown).

[00102] Figures 19, 20 illustrate yet another modification which includes a second alternate mounting means 108" and an alternate scotch yoke apparatus 144'. This modification has many structural elements in common with the embodiments described in Figures 1-18, which elements are identified with the same reference numerals as employed previously. For example, in this modification, a slot 224 is provided in the housing 138, similar to that provided in the structure of Figures 17,18, to permit removal of the shaft 130. However, whereas in the structure of Figures 17,18, a two-part bushing 202 was provided, in this modification, a sleeve-type linear plain bearing 300 is utilized, which is secured to housing 138 by bolts 302. As well, a yoke 152 is provided, similar to that shown in Figures 17,18, but whereas the yoke 152 of Figures 17,18 is mounted for reciprocating movement by shaft 158 and bearings 160,160 in this alternate scotch yoke apparatus 144', the yoke 152 is mounted by means of dovetail linear slide bearings formed of saddles 304,304 securely mounted to the yoke 152 and mating tracks 306 rigidly mounted to housing 138. A support flange 308 is also provided on mixing shaft 130. Support flange 308, in combination with enlarged shaft head 216, provides for a mechanical connection between the shaft 130 and the clamp 163, in addition to the frictional connection effected by the clamping blocks 164,164'.

[00103] By virtue of the use of plain bearing 300, it will be evident that, in order to remove mixer shaft 130, bearing 300 must first be detached from the housing 138, through the removal of screws 302. However, in all other aspects, the structure of this modification operates in a manner substantially identical to that in which the structure of Figure 17 and Figure 18 operates, and as such, is not described in detail herein.

[00104] Other modifications are also possible.

[00105] For example, whereas in the embodiments disclosed, a scotch yoke apparatus is utilized to provide linear reciprocating movement, it will be evident that other mechanisms, such as crank shafts, cam and cam follower mechanisms, and swash plates are possible substituents therefor. It should also be noted that, while in the preferred embodiment illustrated, head axis H-H and longitudinal axis A-A are coincident, this need not be the case.

[00106] As well, whereas in the preferred embodiment illustrated, the mixing head tapers uniformly along its length, so as to take on a substantially frustoconical shape, and the mounting means is adapted to mount the mixing head to the vessel with the first tube end disposed above the second tube end, it is possible for the mixing head to assume non-frustoconical form, wherein the rates of taper differ at the top and bottom ends, and also for the mixing head to be disposed with the second tube end disposed above the first tube end, as illustrated in Figure 16.

[00107] Additionally, whereas the preferred blade portion and support webs are substantially smooth, it is contemplated that the blade portion 112 can be formed with a plurality of perforations 186 each extending between the inner surface 126 and the outer surface 128, as illustrated in Figure 12, and that the support webs 116 may be provided with a plurality of perforations 188, as well as a plurality of tabs 190 each substantially overlying a respective perforation 188 and being connected to the support web 116 at one edge of said respective perforation 188 to form a gill, as illustrated in Figure 11. In this manner, the characteristics of the mixing currents produced by the blade portion in motion can be finely tuned to control the droplet size of the dispersion, and hence, the mixing efficiency of the device, which feature is not available in prior art mixers.

[00108] As a further alternative, illustrated in Figure 13, the blade portion 112 may be provided with a plurality of dimples 192 projecting outwardly from the outer surface 128 and inwardly from the inner surface 126. This allows fine tuning of the mixing device in a manner not taught by the prior art.

[00109] For the purpose of minimizing friction, the preferred crank member 150 is of two-part construction, including an inner axle portion 182 which is fixedly connected to the flywheel 156 and an outer roller portion 184 which is rotatably mounted by bearings (not shown) on the axle portion 182 (best illustrated in Figure 5). However, this is not necessary.

[00110] Flow baffles 184 can also be disposed within the vessel, as indicated also in Figure 16.

[00111] Of course, whereas the detailed description herein pertains specifically to the recovery of copper from copper bearing ores, it should also be understood that the present invention may be utilized in other applications wherein SXEW processes are utilized, such as, for example, in the recovery of zinc, nickel, platinum and molybdenum.

[00112] Moreover, it will be evident that the invention may have advantageous utility even outside the SXEW process, in other mixing applications, such as in the context of a froth flotation cell, illustrated in Figures 14 and 15, wherein the mixing apparatus is used to agitate a slurry to form a froth, and a paddle mechanism 32 is operatively mounted to the vessel 102 to scour froths produced thereby.

[00113] It will, of course, also be understood that various other modifications and alterations may be used in the design and manufacture of the mixing apparatus according to the present invention without departing from its spirit and scope. Accordingly, the scope of the present invention should be understood as limited only by the accompanying claims, purposively construed.

## WE CLAIM:

1. A mixing apparatus for use with a vessel having a contiguous sidewall centered about and defining a longitudinal axis, the mixing apparatus comprising:

a mixing head having a tubular blade portion centered about and defining a head axis and having a first tube end and a second tube end spaced-apart from one another therealong, the blade portion tapering from the first tube end to the second tube end with the inner surface of the blade portion and the second end defining an inside blade diameter "ID" and the outer surface of the blade portion and the first end defining an outer blade diameter "OD";

mounting means for mounting the mixing head substantially coaxial to and within the vessel for longitudinal movement relative thereto; and

reciprocating means for effecting said longitudinal relative movement of the mixing head in a reciprocating manner through a stroke length "S", with a duration "T" for each cycle,

wherein  $175 \leq 0.36 \times OD^2/ID^2 \times S/T \leq 250$

when OD, ID and S are each expressed in inches, and T is expressed in minutes.



2. A mixing apparatus according to claim 1, wherein the blade portion tapers in a substantially frustoconical manner from the first tube end to the second tube end.
3. A mixing apparatus according to claim 2, wherein  
  
a pair of axes are defined by and coincident with the intersections of the outer surface of the blade portion and a plane coincident with the head axis; and  
  
 $90^\circ \leq \alpha \leq 180^\circ$ , wherein angle  $\alpha$  is defined by the angle between said pair of axes.
4. A mixing apparatus according to claim 1, wherein the mounting means comprises a mixer shaft, the mixer shaft having a bottom end operatively rigidly connected to the mixing head and extending from said bottom end, substantially parallel to the head axis, to a top end which is disposed above the vessel in use.
5. A mixing apparatus according to claim 4, wherein the reciprocating means comprises shaft gripping means for gripping the mixer shaft adjacent the top end for effecting longitudinal reciprocating movement of the shaft gripping means through stroke length "S" with duration "T" for each cycle, thereby to effect said longitudinal movement of the mixing head in said reciprocating manner.

6. A mixing apparatus according to claim 5, further comprising a housing positionable above said vessel.

7. A mixing apparatus according to claim 6, wherein the reciprocating means comprises:

a flywheel mounted to the housing for rotation about a rotational axis which is normal to the longitudinal axis;

a crank member projecting from the flywheel in a direction parallel to the rotational axis and connected to the flywheel for rotation therewith; and

a yoke displaced from the flywheel in the direction of the crank member and having a substantially linear race formed therein which is in receipt of the crank member and is adapted to permit relative translational movement of the crank member and the yoke, wherein the yoke is positioned with the race arranged normal to the rotation axis and bisected thereby and is mounted to the housing in a manner which constrains movement of the yoke therefrom otherwise than along an axis parallel to the longitudinal axis and normal to the rotational axis such that, during rotation of the flywheel, the crank member imparts longitudinal reciprocating movement to the yoke, and wherein the shaft gripping means is operatively rigidly connected to the yoke for longitudinal reciprocating movement therewith.

8. A mixing apparatus according to claim 7, wherein the reciprocating means includes a drive means for driving said rotation of the flywheel.
9. A mixing apparatus according to claim 8, wherein the drive means is an electric motor.
10. A mixing apparatus according to claim 4, wherein the mixer shaft extends from the mixing head substantially coincident with the head axis.
11. A mixing apparatus according to claim 10, wherein the bottom end of the mixer shaft is operatively rigidly connected to the mixing head by a hub member rigidly connected to the bottom end of the mixer shaft and a plurality of support webs extending between and connecting the hub member and the blade portion.
12. A mixing apparatus according to claim 11, wherein the support webs are formed with a plurality of perforations extending therethrough, and with a plurality of tabs, each tab substantially overlying a respective one of the plurality of perforations and being connected to the support web at one edge of said respective one of the plurality of perforations to form a gill.

13. A mixing apparatus according to claim 1, wherein the blade portion has a plurality of dimples projecting outwardly from the outer surface.
14. A mixing apparatus according to claim 1, wherein the blade portion has a plurality of dimples projecting inwardly from the inner surface.
15. A mixing apparatus according to claim 1, wherein the blade portion has a plurality of perforations each extending between the inner surface and the outer surface.
16. A mixing apparatus according to claim 1, wherein the mounting means is adapted to mount the mixing head within the vessel with the first tube end disposed below the second tube end.
17. A mixing apparatus according to claim 1, wherein the mounting means is adapted to mount the mixing head within the vessel with the first tube end disposed above the second tube end.
18. Use of the mixing apparatus of claim 1 as a mixer for a vessel in an SXEW extractor unit, the vessel having an internal diameter D and a height H.

19. Use according to claim 17, wherein OD:D is between about 1:2.5 to 1:4 and ID:OD is between about 1:0 to 1.5.
20. Use according to claim 18, wherein D:H is approximately 1:1.
21. Use of the mixing apparatus of claim 1 as a mixer for the vessel in a froth flotation cell.
22. A mixing apparatus according to claim 6, wherein the mounting means further comprises a linear bearing assembly supporting the mixer shaft, in use, for longitudinal movement, the linear bearing assembly so supporting the mixer shaft at a first location, relatively proximal to the shaft gripping means, and at a second location, disposed downwardly from the first location and relatively distal to the shaft gripping means.
23. A mixing apparatus according to claim 22, wherein the linear bearing assembly includes a first portion securely attached to the housing and disposed to one side of the mixer shaft in use and a second portion, disposed to the other side of the mixer shaft in use and operatively removably secured to the housing to permit, when removed, removal and replacement of the mixer shaft.

24. A mixing apparatus according to claim 22, wherein the linear bearing assembly includes a bushing to provide for said support of the mixer shaft at the first location, the bushing being formed of mating bushing blocks which form, respectively, part of the first portion and the second portion of the linear bearing assembly.
25. A mixing apparatus according to claim 24, wherein the linear bearing assembly includes a plurality of rollers arranged to circumferentially surround said mixer shaft in use and thereby to provide for said support of the mixer shaft at the second location, the plurality of rollers being formed of mating roller subassemblies which form, respectively, part of the first portion and the second portion of the linear bearing assembly.
26. A mixing apparatus according to claim 25, wherein the roller subassembly which forms part of the first portion comprises a pair of rollers, and wherein the roller subassembly which forms part of the second portion comprises one roller.

## ABSTRACT OF THE DISCLOSURE

A mixer apparatus for use with a vessel centered about a longitudinal axis is disclosed. The mixer has a tubular blade which: defines a central head axis; has a first end and a second end spaced from the first end along the head axis; and tapers from the first end to the second end. The inner surface of the blade and the second end define an inside blade diameter "ID" and the outer surface of the blade and the first end define an outer blade diameter "OD". The blade is positioned within and coaxial to the vessel. A scotch yoke, operatively connected to the blade by a shaft, effects reciprocating longitudinal movement of the blade through a stroke "S", with a duration "T" for each cycle, wherein  $175 \leq 0.36 \times OD^2/ID^2 \times S/T \leq 250$  when OD, ID and S are expressed in inches, and T is expressed in minutes.

Please type a plus sign (+) inside this box 

PTO/SB/81 (02-01)

Approved for use through 10/31/2002 OMB 0851-0035

U.S. Patent and Trademark Office U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

**POWER OF ATTORNEY OR  
AUTHORIZATION OF AGENT**

Application Number	n/a
Filing Date	n/a
First Named Inventor	Gary Haughton
Group Art Unit	n/a
Examiner Name	n/a
Attorney Docket Number	93177pus

I hereby appoint:

☒ Practitioners at Customer Number

06431

OR

☐ Practitioner(s) named below:

06431

PATENT TRADEMARK OFFICE

Name	Registration Number

as my/our attorney(s) or agent(s) to prosecute the application identified above, and to transact all business in the United States Patent and Trademark Office connected therewith.

Please change the correspondence address for the above-identified application to:

☒ The above-mentioned Customer Number.

OR

☐ Practitioner(s) at Customer Number.

OR

Place Customer  
Number Bar Code  
Label here☐ Firm or  
Individual Name

Address

Address

City

State

Zip

Country

Telephone

Fax

I am the:

☒ Applicant/Inventor.☐ Assignee of record of the entire interest. See 37 CFR 3.71.  
Statement under 37 CFR 3.73(b) is enclosed. (Form PTO/SB/96).**SIGNATURE of Applicant or Assignee of Record**

Name Tom Ostrowski

Signature

Date

NOTE: Signatures of all the inventors or assignees of record of the entire interest or their representative(s) are required. Submit multiple forms if more than one signature is required, see below\*.

☒ \*Total of 3 forms are submitted.

Burden Hour Statement: This form is estimated to take 3 minutes to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.



Please type a plus sign (+) inside this box 

PTO/SB/81 (02-01)

Approved for use through 10/31/2002, OMB 0851-0035

U.S. Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

**POWER OF ATTORNEY OR  
AUTHORIZATION OF AGENT**

Application Number	n/a
Filing Date	n/a
First Named Inventor	Gary Haughton
Group Art Unit	n/a
Examiner Name	n/a
Attorney Docket Number	93177pus

I hereby appoint:

☒ Practitioners at Customer Number

06431

OR

☐ Practitioner(s) named below:

06431

PATENT, TRADEMARK OFFICE

Name	Registration Number

as my/our attorney(s) or agent(s) to prosecute the application identified above, and to transact all business in the United States Patent and Trademark Office connected therewith.

Please change the correspondence address for the above-identified application to:

☒ The above-mentioned Customer Number.

OR

☐ Practitioner(s) at Customer Number.

OR

Place Customer  
Number Bar Code  
Label here☐ Firm or  
Individual Name

Address

Address

City

State

Zip

Country

Telephone

Fax

I am the:

☒ Applicant/Inventor.☐ Assignee of record of the entire interest. See 37 CFR 3.71.

Statement under 37 CFR 3.73(b) is enclosed. (Form PTO/SB/96).

**SIGNATURE of Applicant or Assignee of Record**

Name Gary Haughton

Signature

Date

NOTE: Signatures of all the inventors or assignees of record of the entire interest or their representative(s) are required. Submit multiple forms if more than one signature is required, see below\*.

☒ \*Total of 3 forms are submitted.

Burden Hour Statement: This form is estimated to take 3 minutes to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → +

PTO/SB/81 (02-01)

Approved for use through 10/31/2002. OMB 0651-0035

U.S. Patent and Trademark Office U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**POWER OF ATTORNEY OR  
AUTHORIZATION OF AGENT**

Application Number	n/a
Filing Date	n/a
First Named Inventor	Gary Haughton
Group Art Unit	n/a
Examiner Name	n/a
Attorney Docket Number	93177pus

I hereby appoint:

☒ Practitioners at Customer Number

06431

OR

☐ Practitioner(s) named below:

06431

PATENT TRADEMARK OFFICE

Name	Registration Number

as my/our attorney(s) or agent(s) to prosecute the application identified above, and to transact all business in the United States Patent and Trademark Office connected therewith.

Please change the correspondence address for the above-identified application to:

☒ The above-mentioned Customer Number.

OR

☐ Practitioner(s) at Customer Number.

OR

Place Customer  
Number Bar Code  
Label here☐ Firm or  
Individual Name

Address

Address

City

State

Zip

Country

Telephone

Fax

I am the:

☒ Applicant/Inventor.☐ Assignee of record of the entire interest. See 37 CFR 3.71.  
Statement under 37 CFR 3.73(b) is enclosed. (Form PTO/SB/96).**SIGNATURE of Applicant or Assignee of Record**

Name Martin Behr

Signature

Date

NOTE: Signatures of all the inventors or assignees of record of the entire interest or their representative(s) are required. Submit multiple forms if more than one signature is required, see below\*.

☒ \*Total of 3 forms are submitted.

Burden Hour Statement: This form is estimated to take 3 minutes to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# DECLARATION (37 CFR 1.63) FOR UTILITY OR DESIGN APPLICATION USING AN APPLICATION DATA SHEET (37 CFR 1.76)

Title of Invention	MIXING APPARATUS
--------------------	------------------

As the below named inventor(s), I/we declare that:

This declaration is directed to:

☐ The attached application, or

☒ Application No. \_\_\_\_\_, filed on \_\_\_\_\_,

☐ as amended on \_\_\_\_\_ (if applicable);

I/we believe that I/we am/are the original and first inventor(s) of the subject matter which is claimed and for which a patent is sought;

I/we have reviewed and understand the contents of the above-identified application, including the claims, as amended by any amendment specifically referred to above;

I/we acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me/us to be material to patentability as defined in 37 CFR 1.56, including for continuation-in-part applications, material information which became available between the filing date of the prior application and the National or PCT International filing date of the continuation-in-part application.

All statements made herein of my/our own knowledge are true, all statements made herein on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001, and may jeopardize the validity of the application or any patent issuing thereon.

FULL NAME OF INVENTOR(S)	
Inventor one:	Gary Haughton
Signature:	Citizen of: Canada
Inventor two:	Martin Behr
Signature:	Citizen of: Canada
Inventor three:	Tom Ostrowski
Signature:	Citizen of: Canada
Inventor four:	
Signature:	Citizen of:

☐ Additional inventors are being named on \_\_\_\_\_ additional form(s) attached hereto.

Burden Hour Statement: This collection of information is required by 35 U.S.C. 115 and 37 CFR 1.63. The information is used by the public to file (and the PTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This form is estimated to take 1 minute to complete. This time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

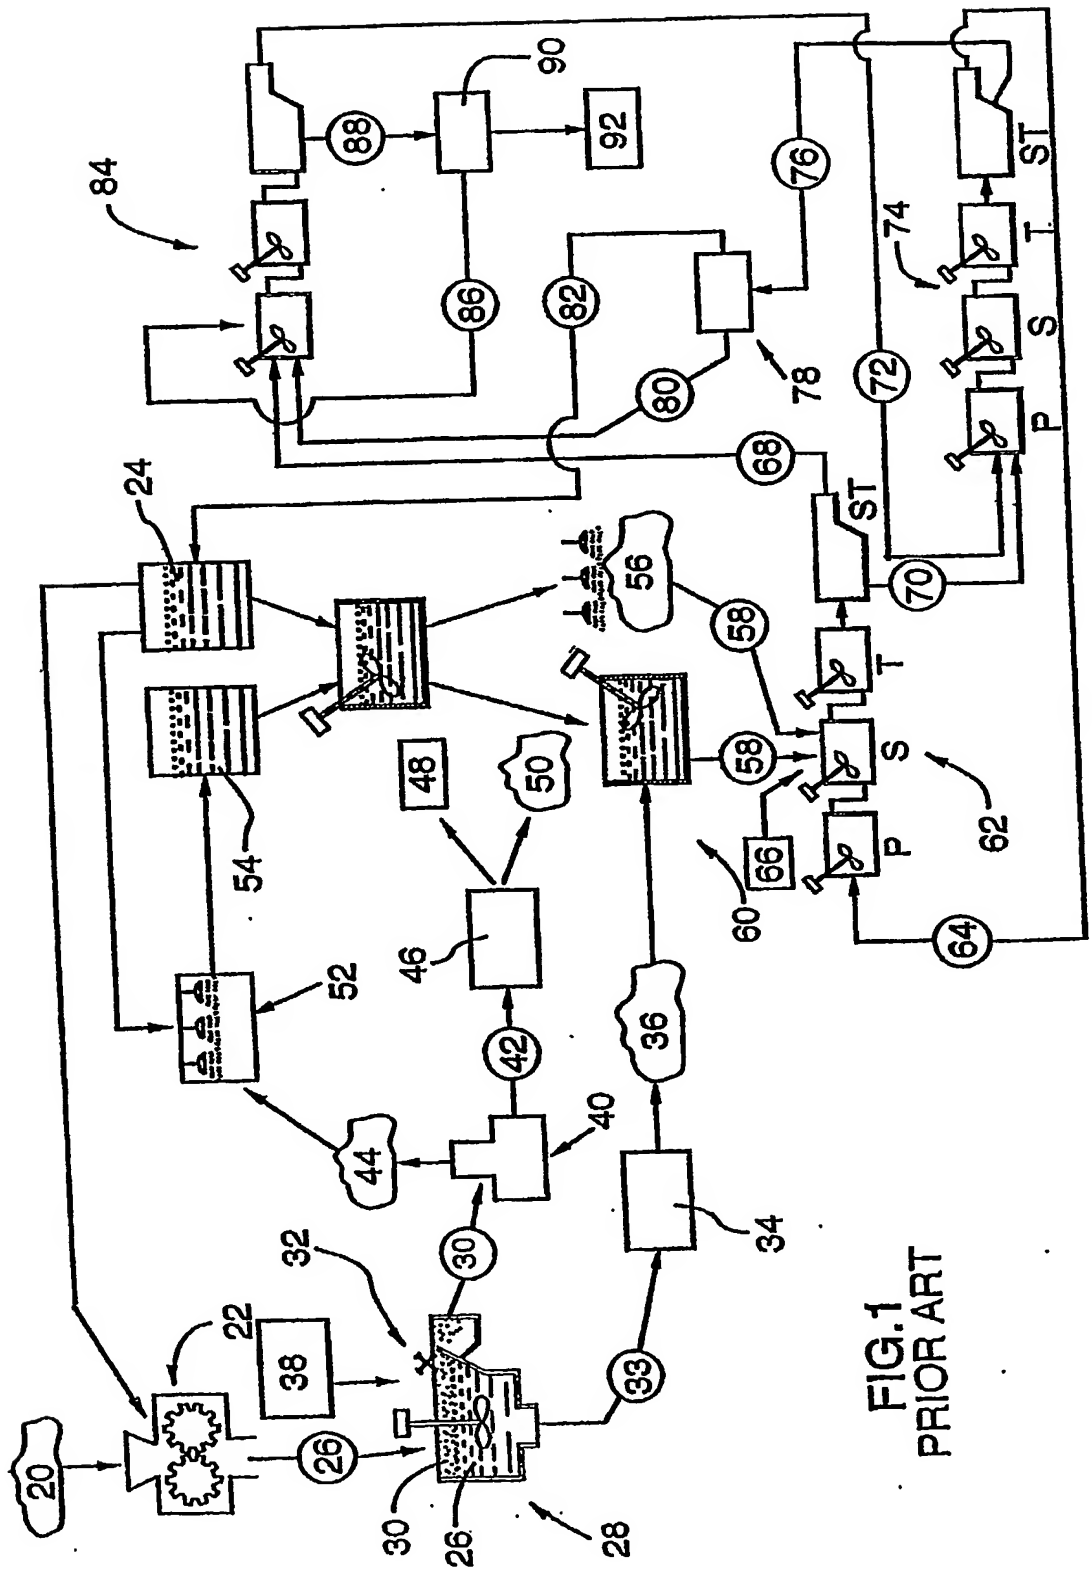


FIG.1  
PRIOR ART

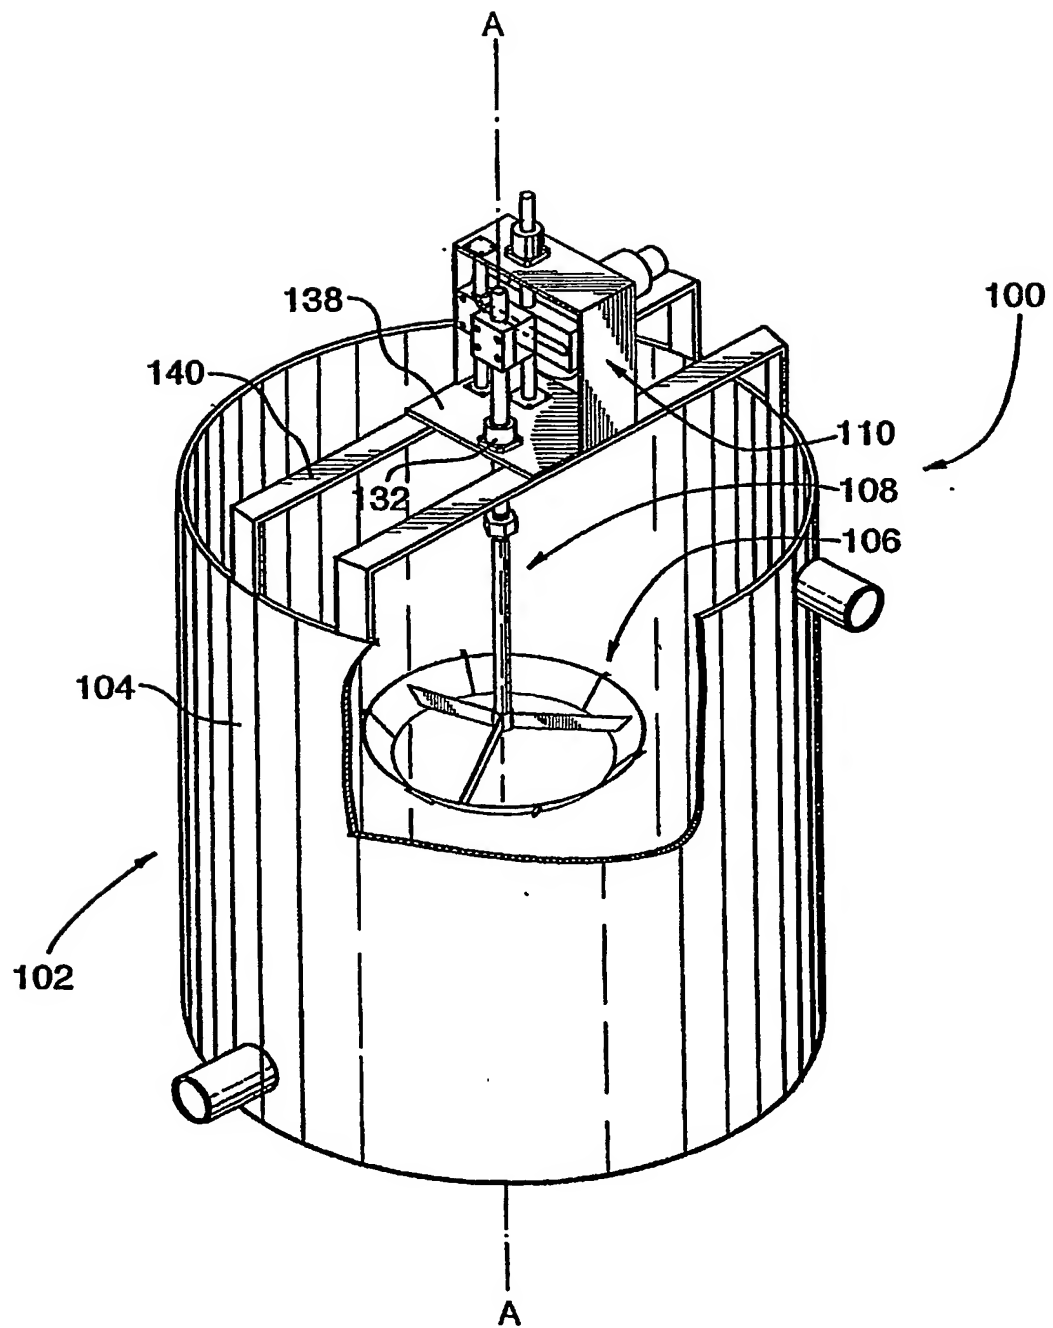


FIG.2





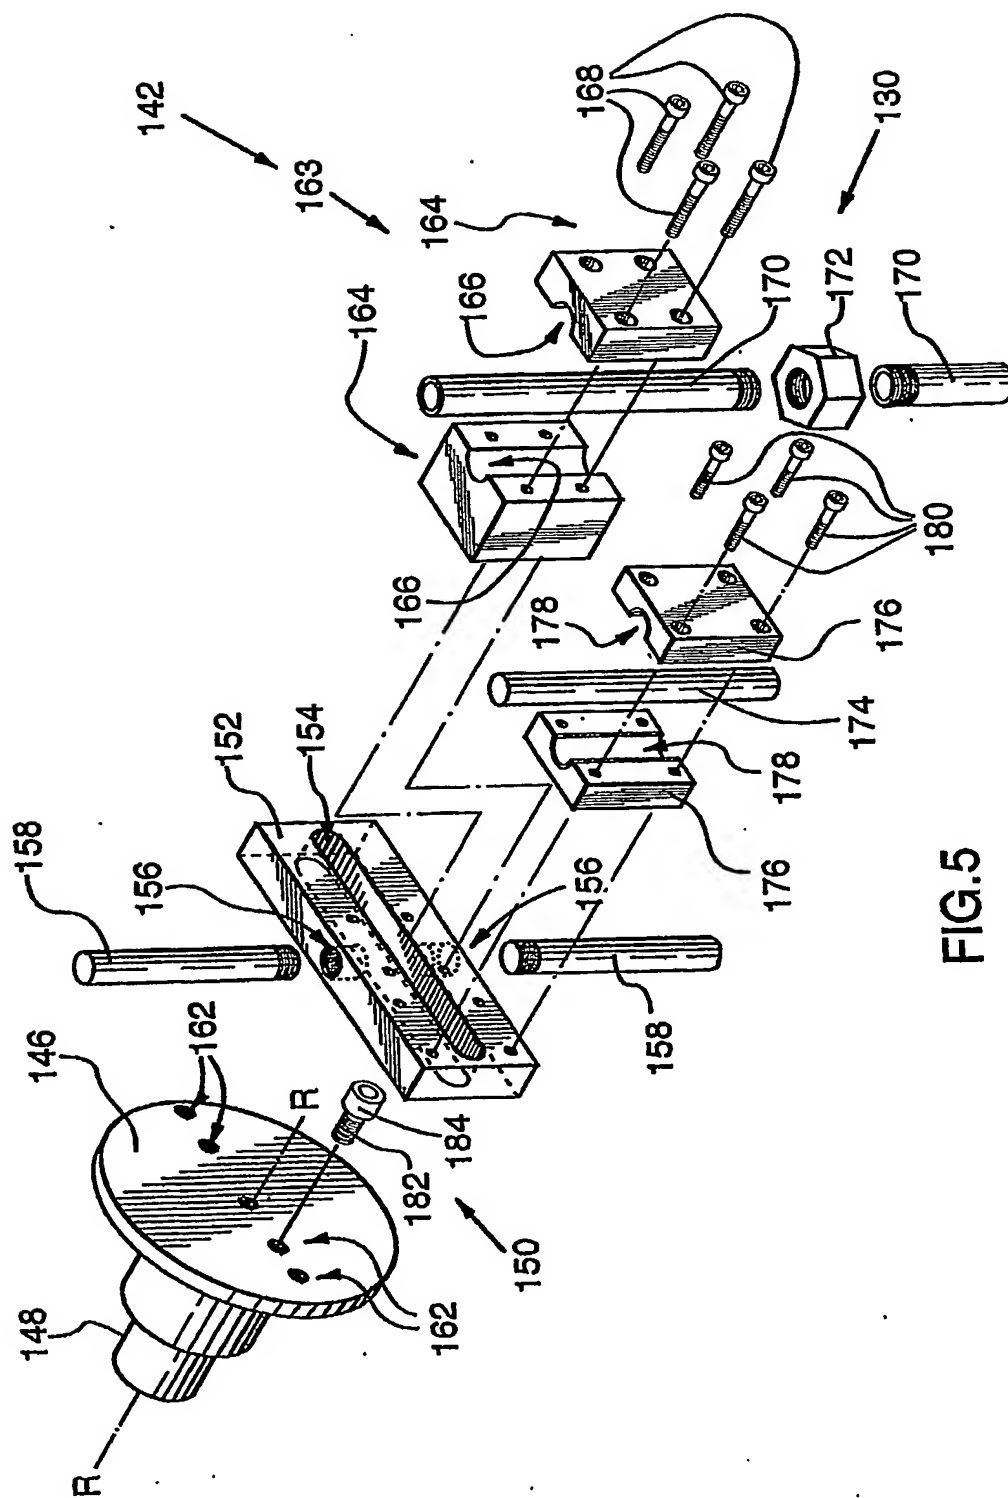


FIG.5



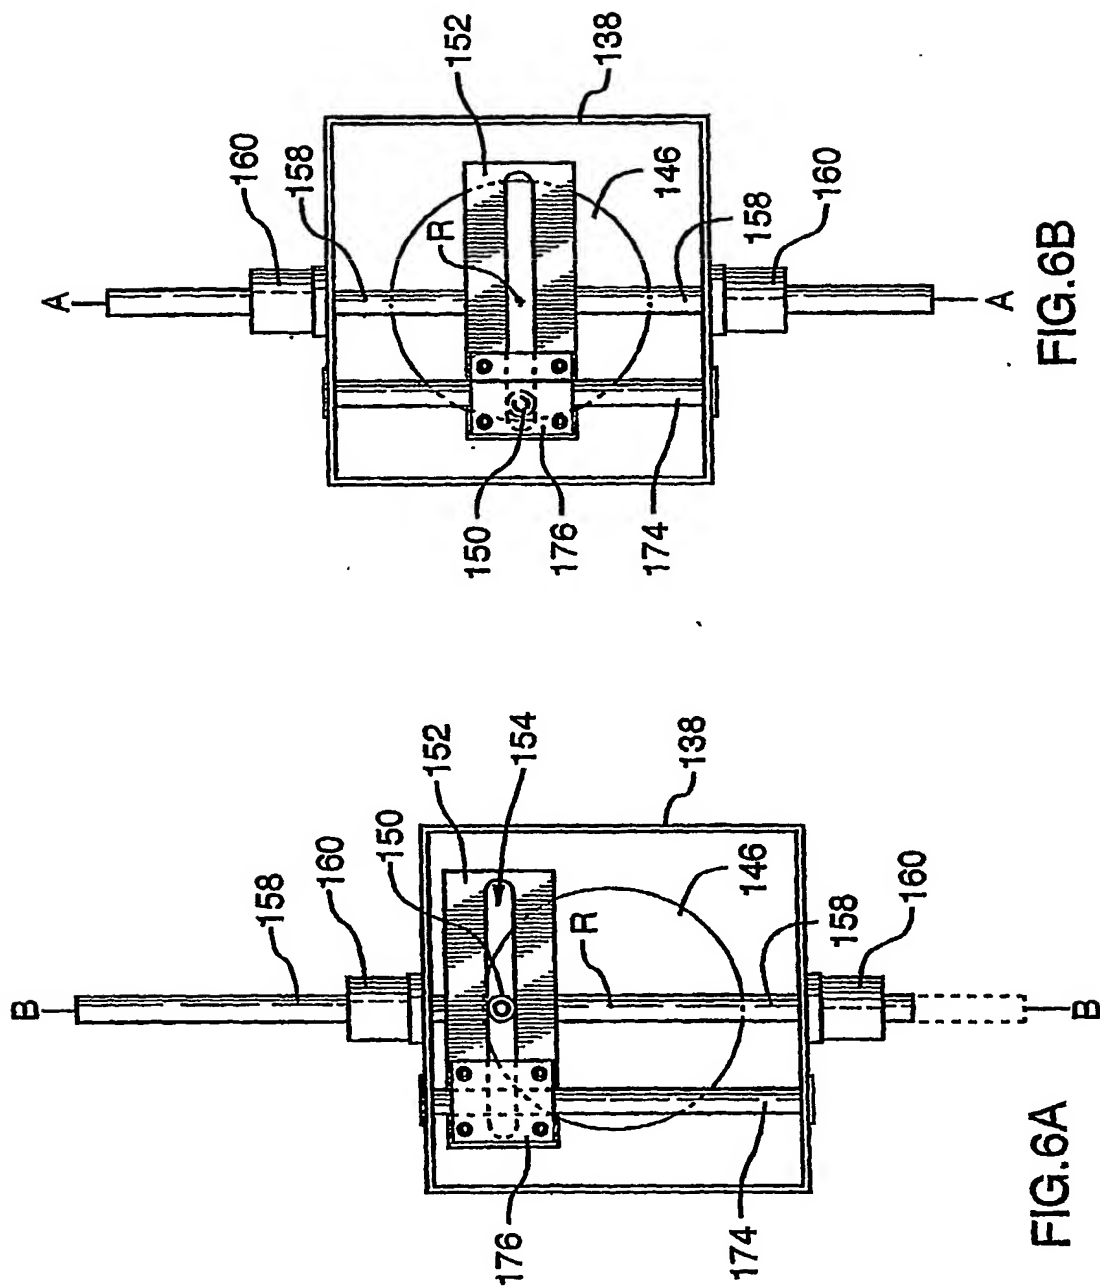


FIG. 6B

FIG. 6A

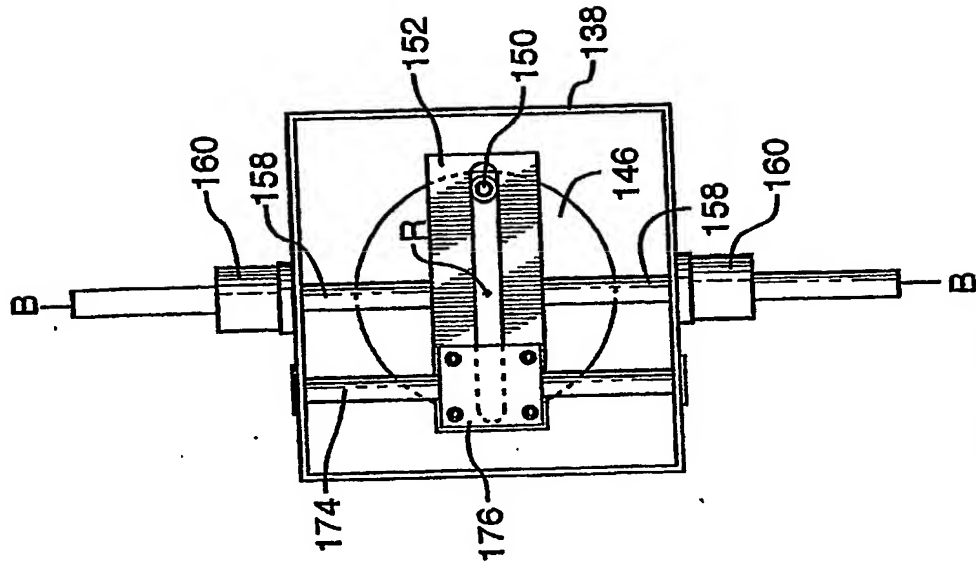


FIG. 6D

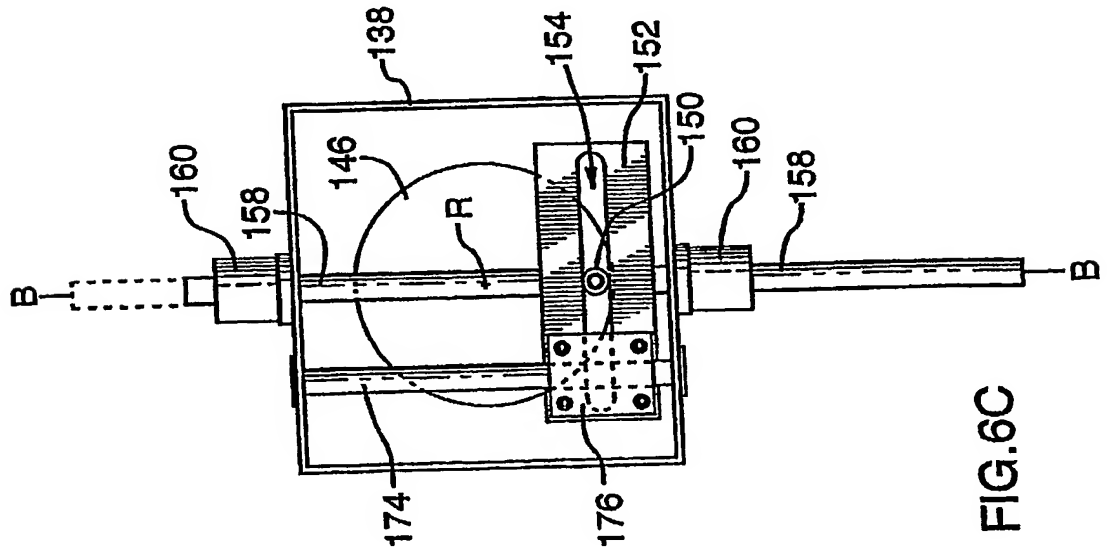
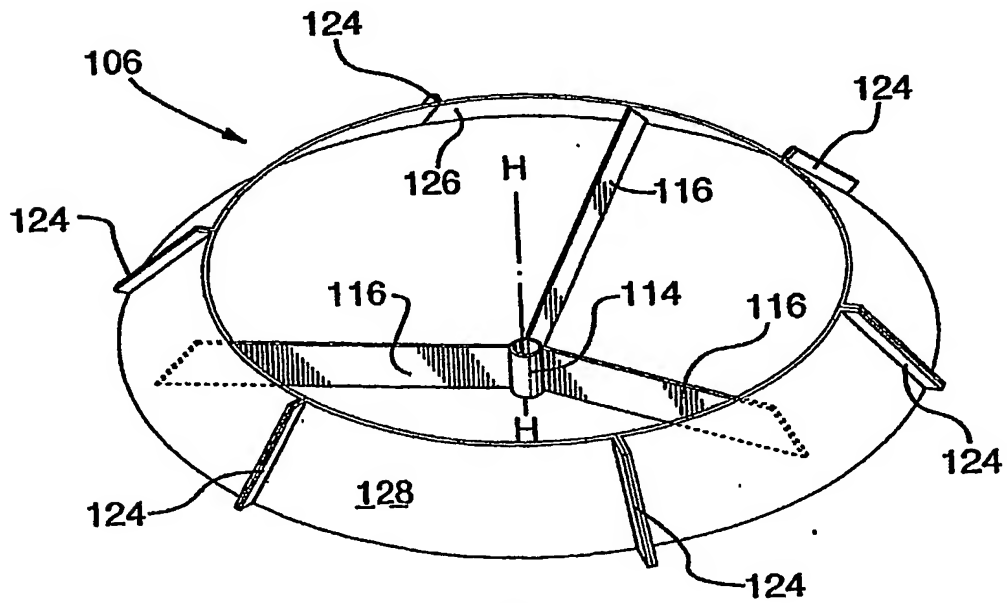
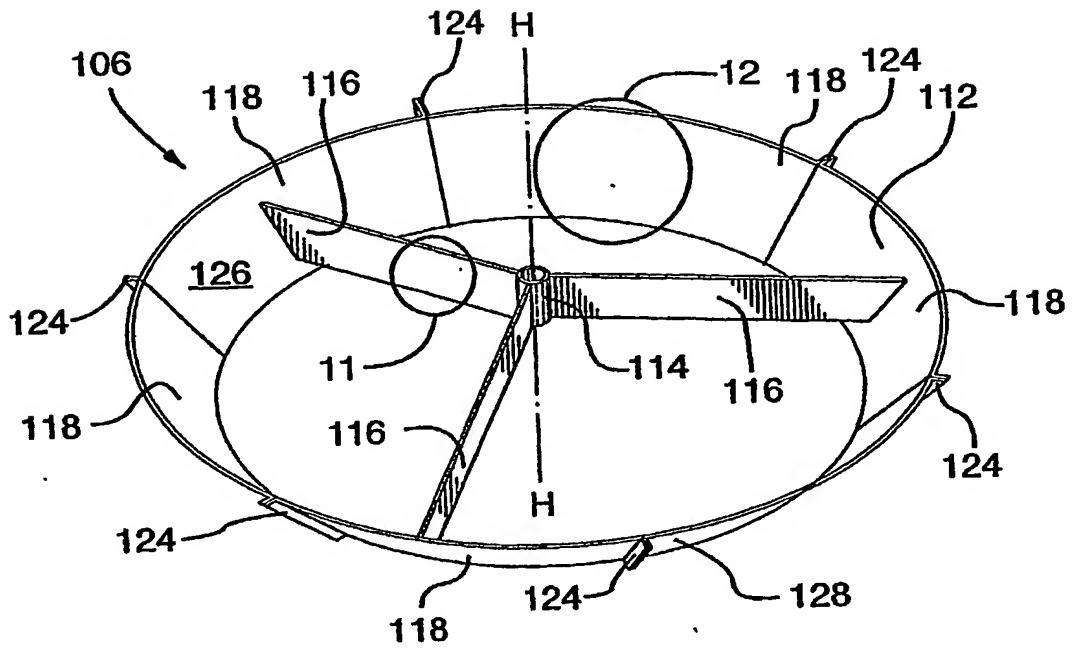


FIG. 6C



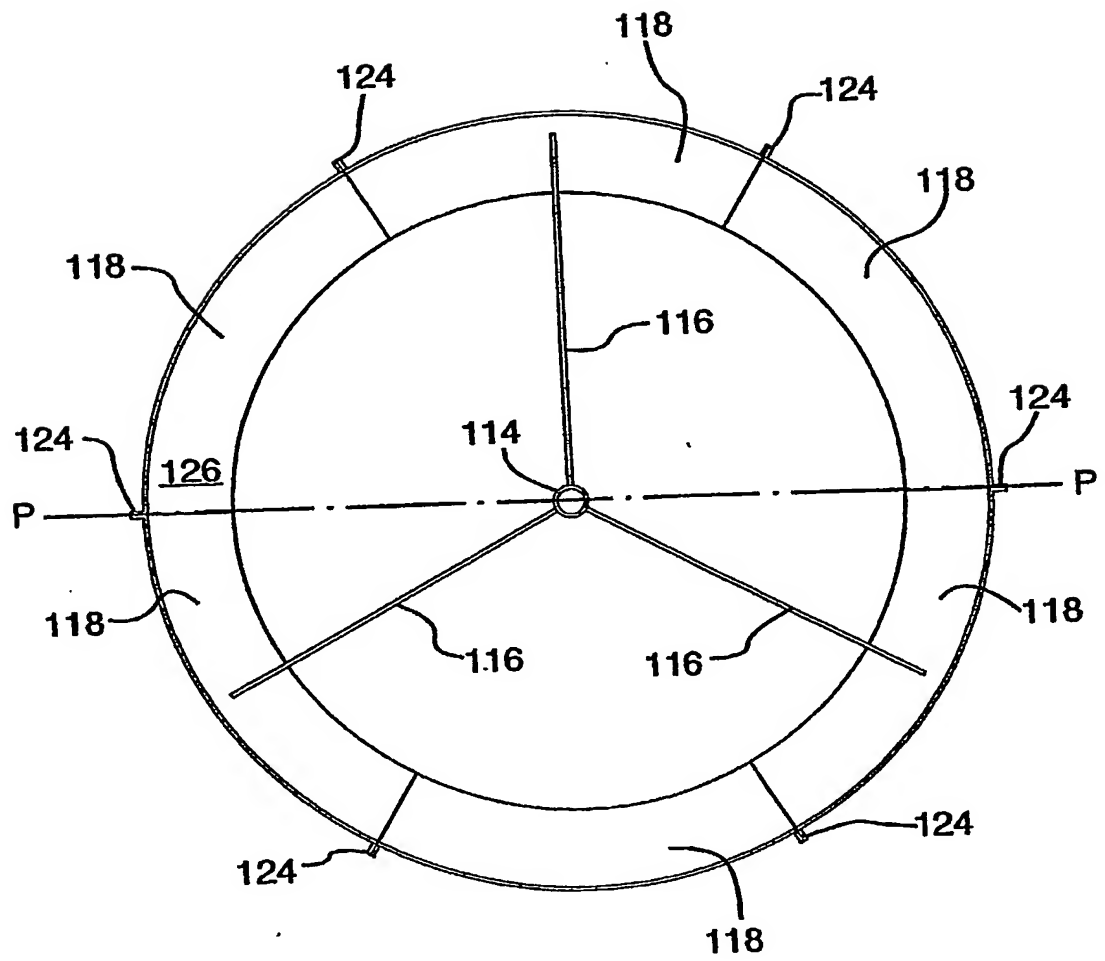


FIG.9

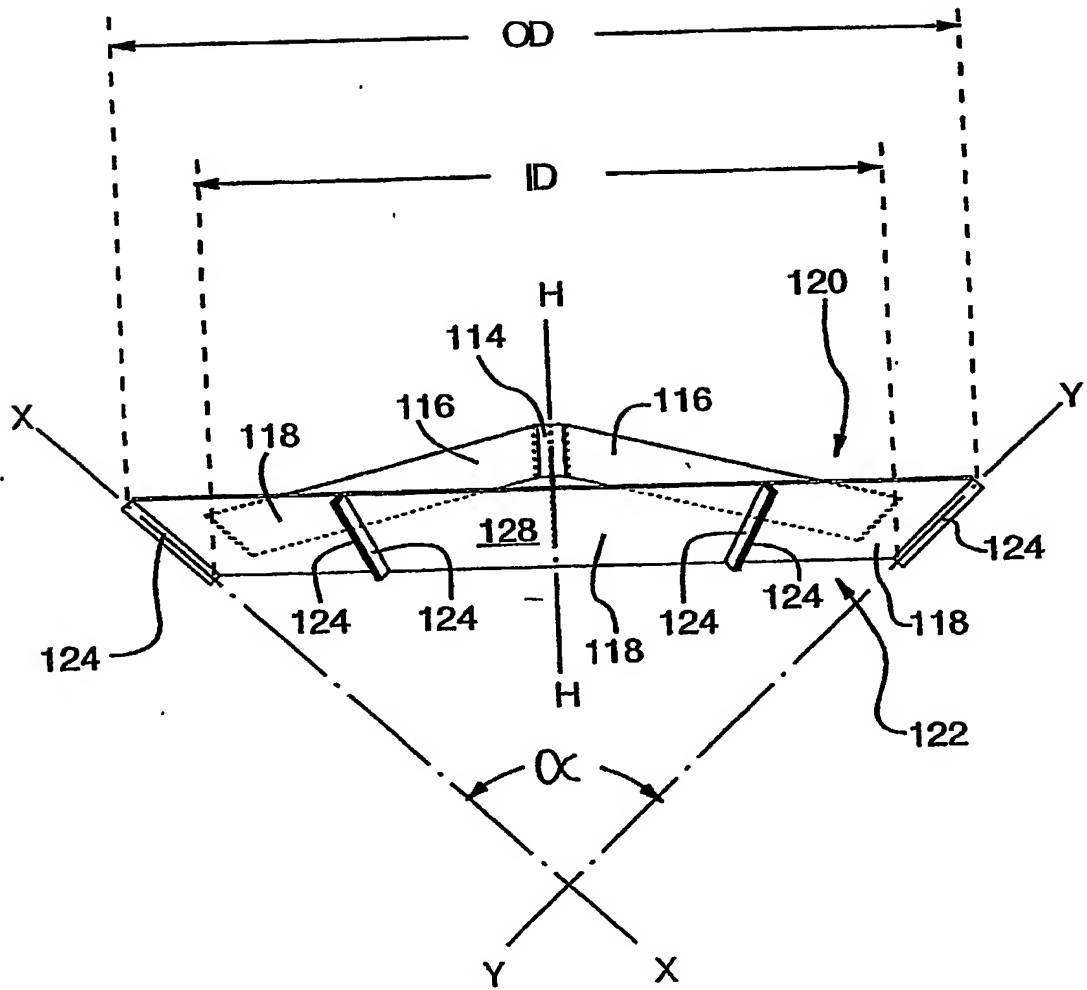


FIG.10

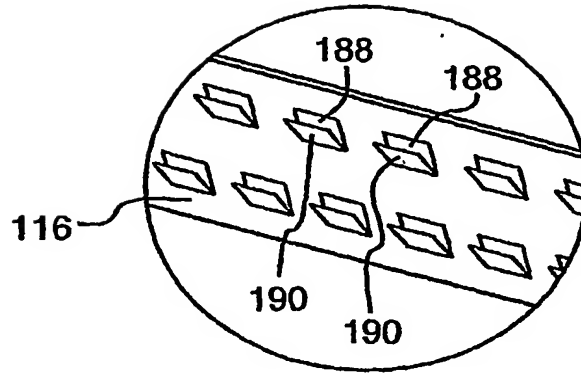


FIG. 11

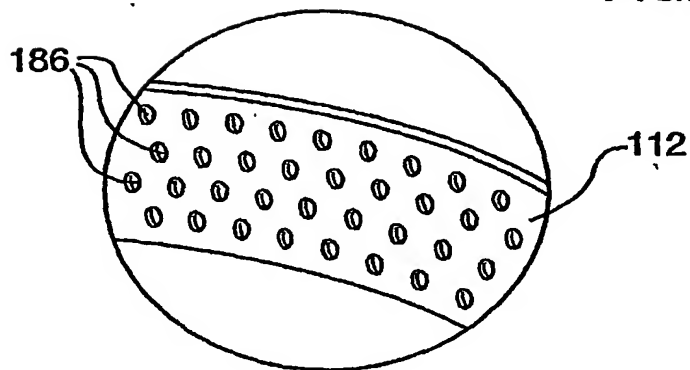


FIG. 12

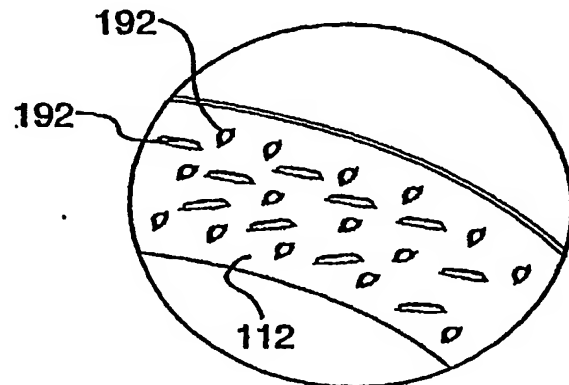


FIG. 13

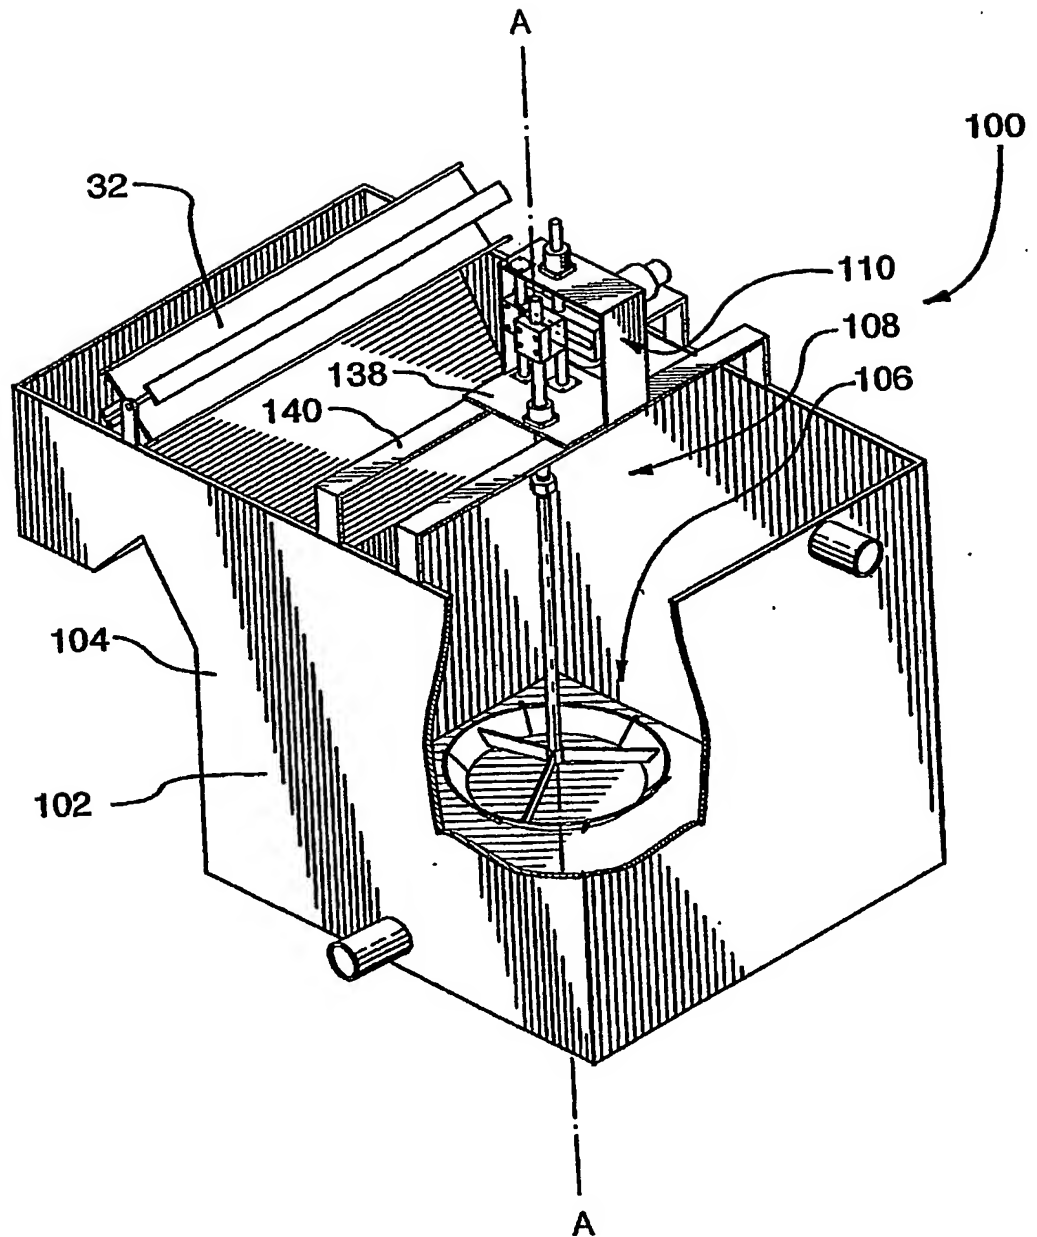


FIG. 14

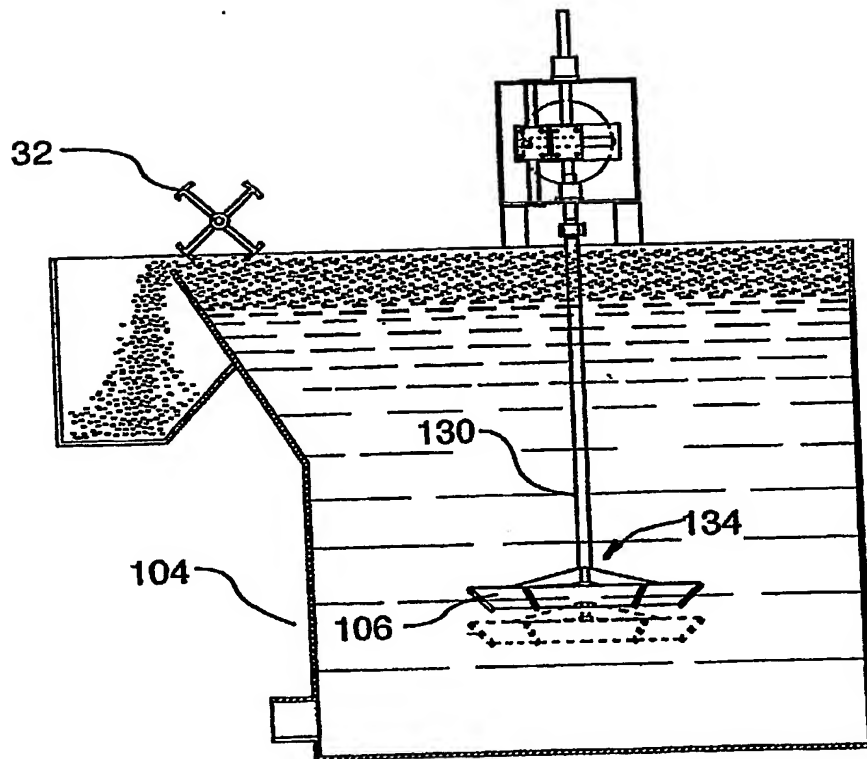


FIG.15



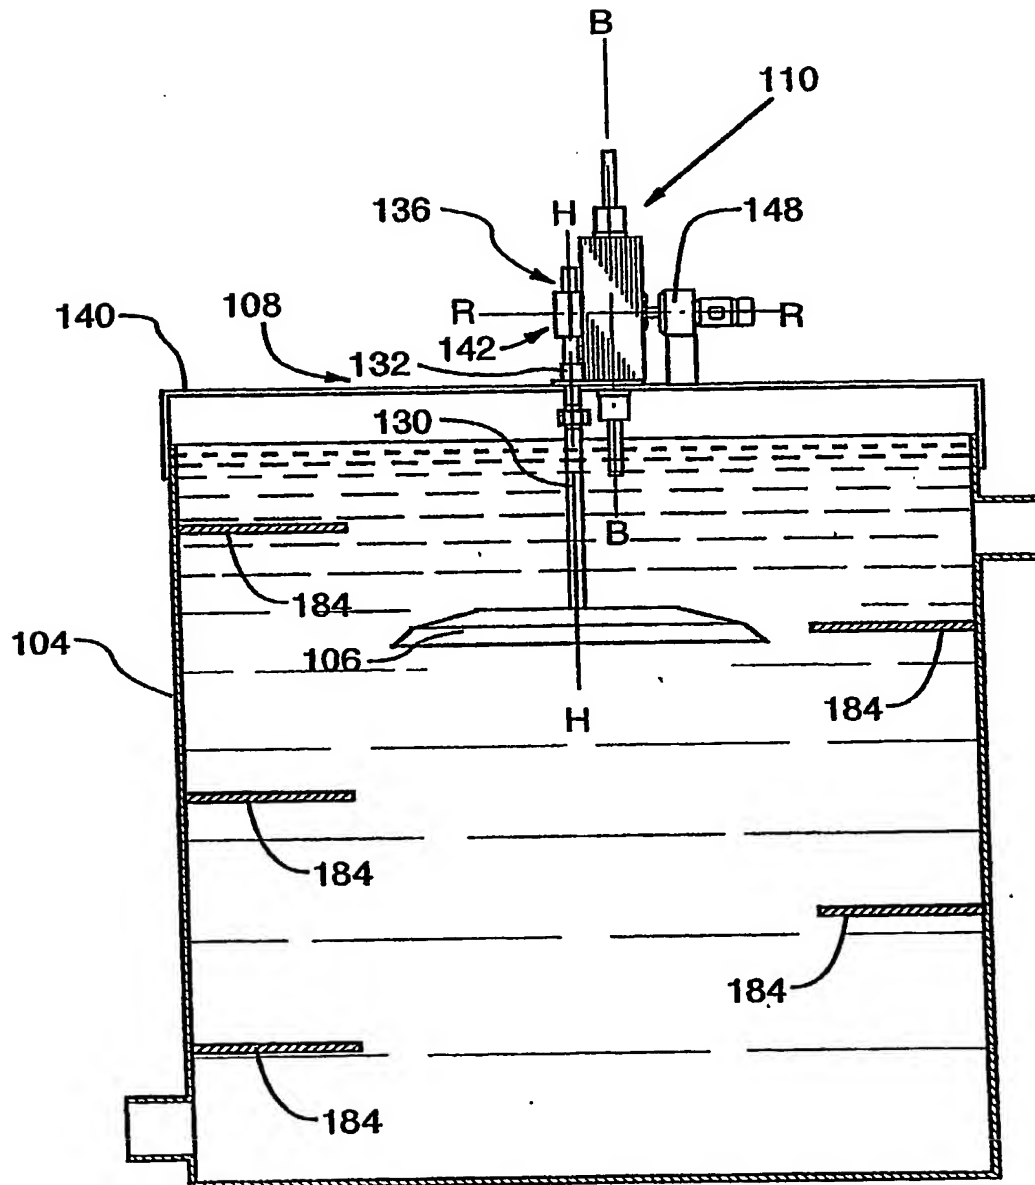
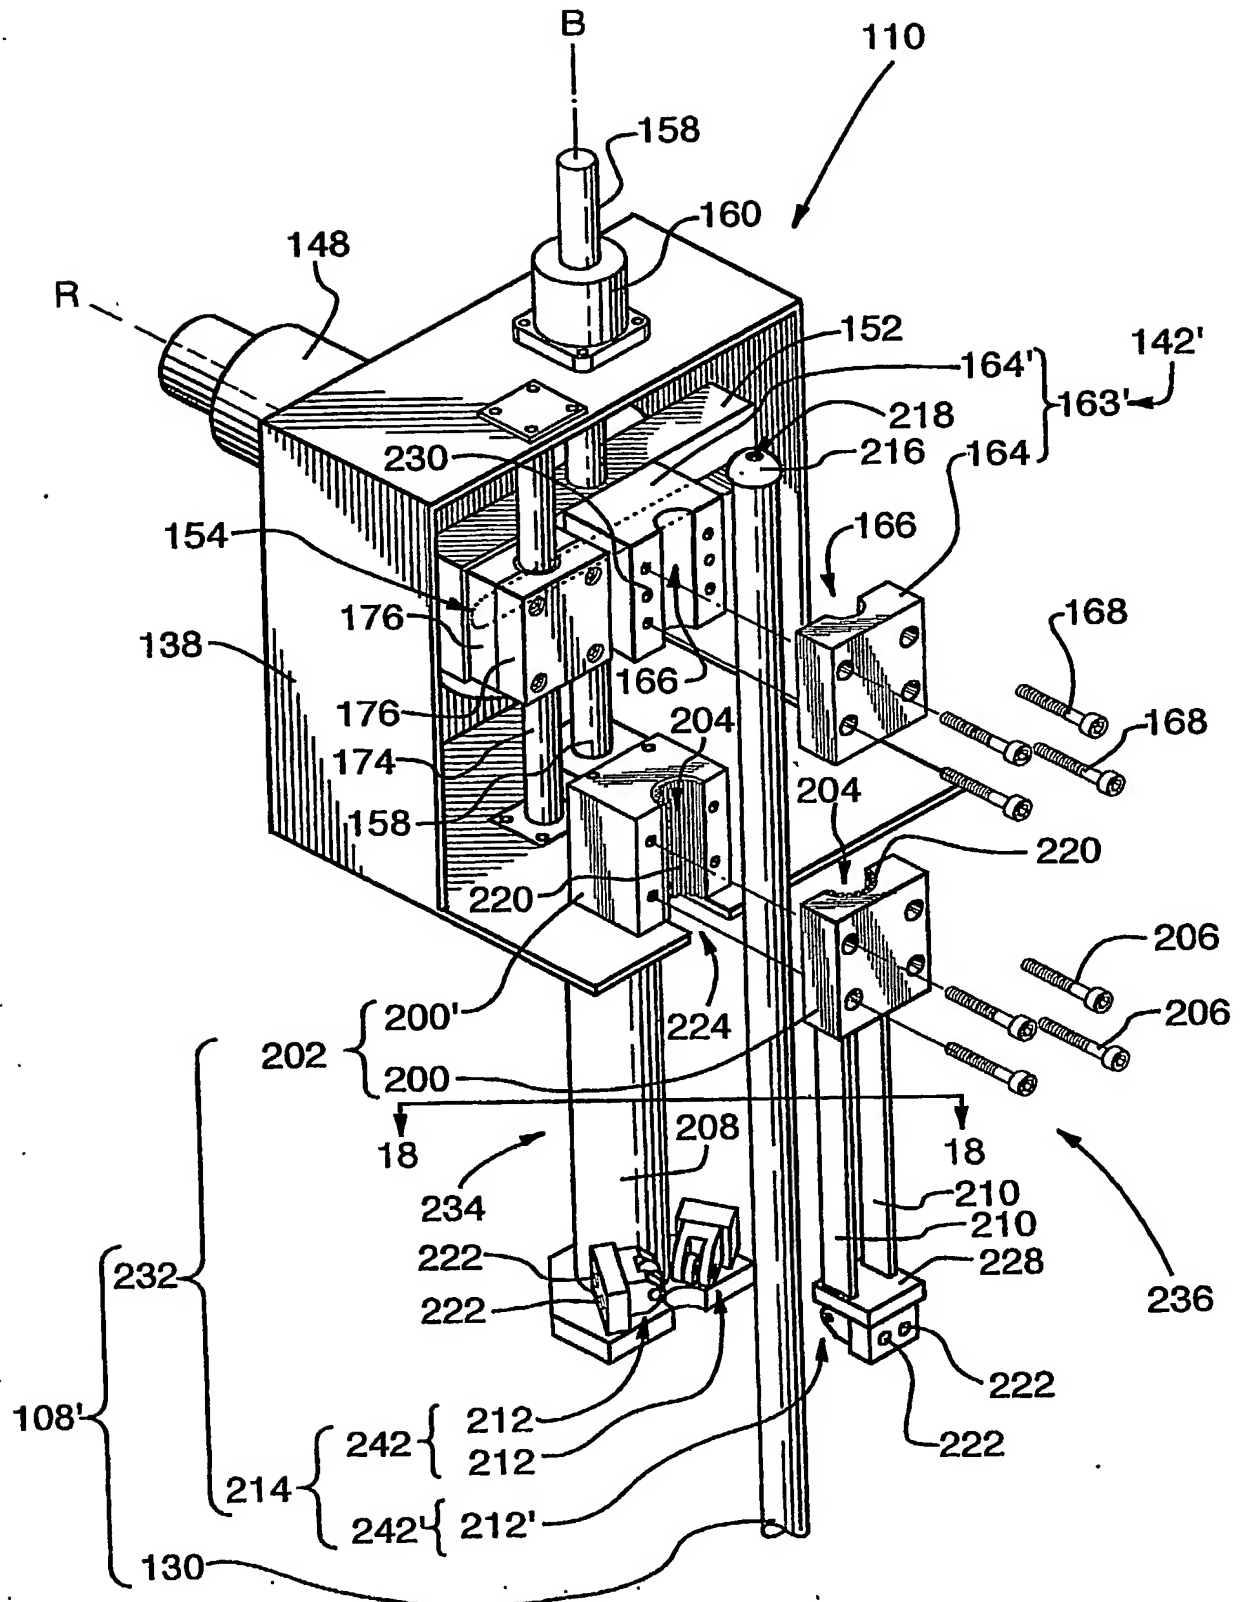


FIG.16





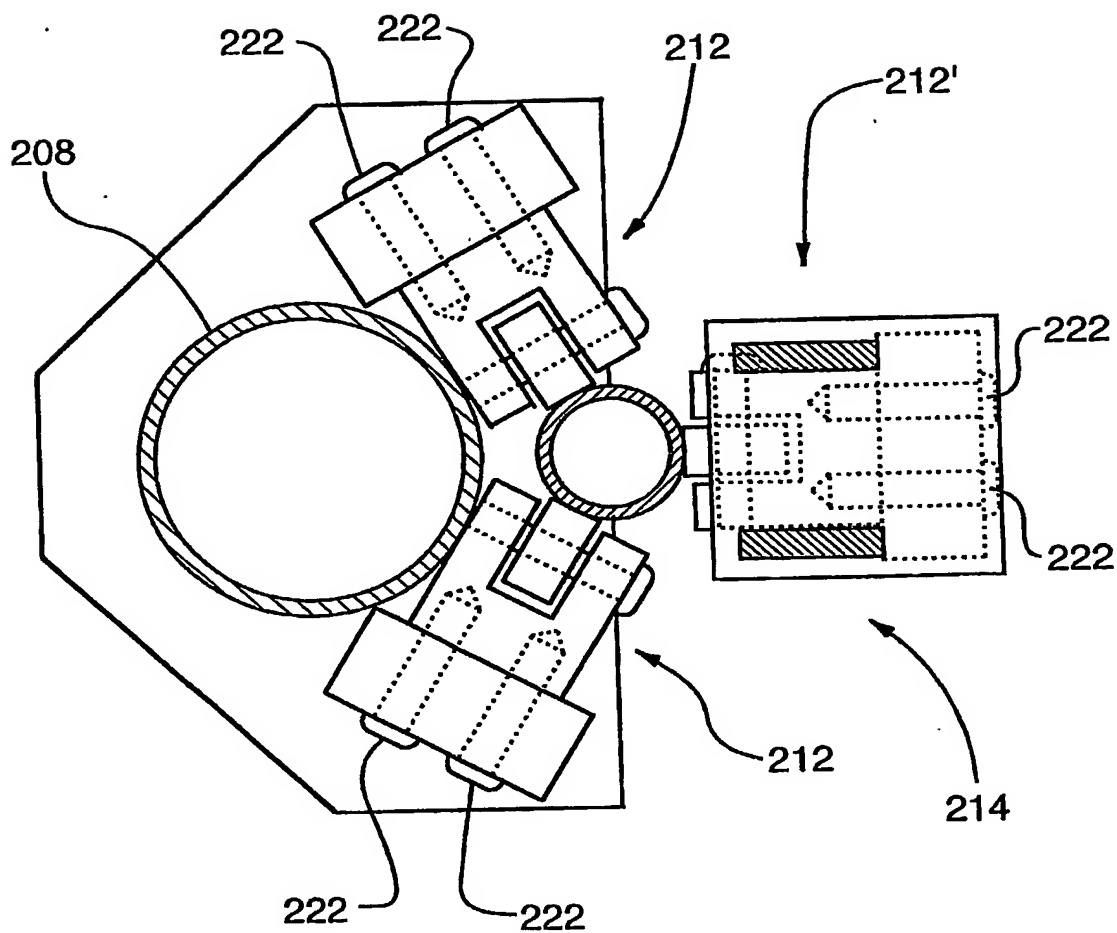


FIG.18

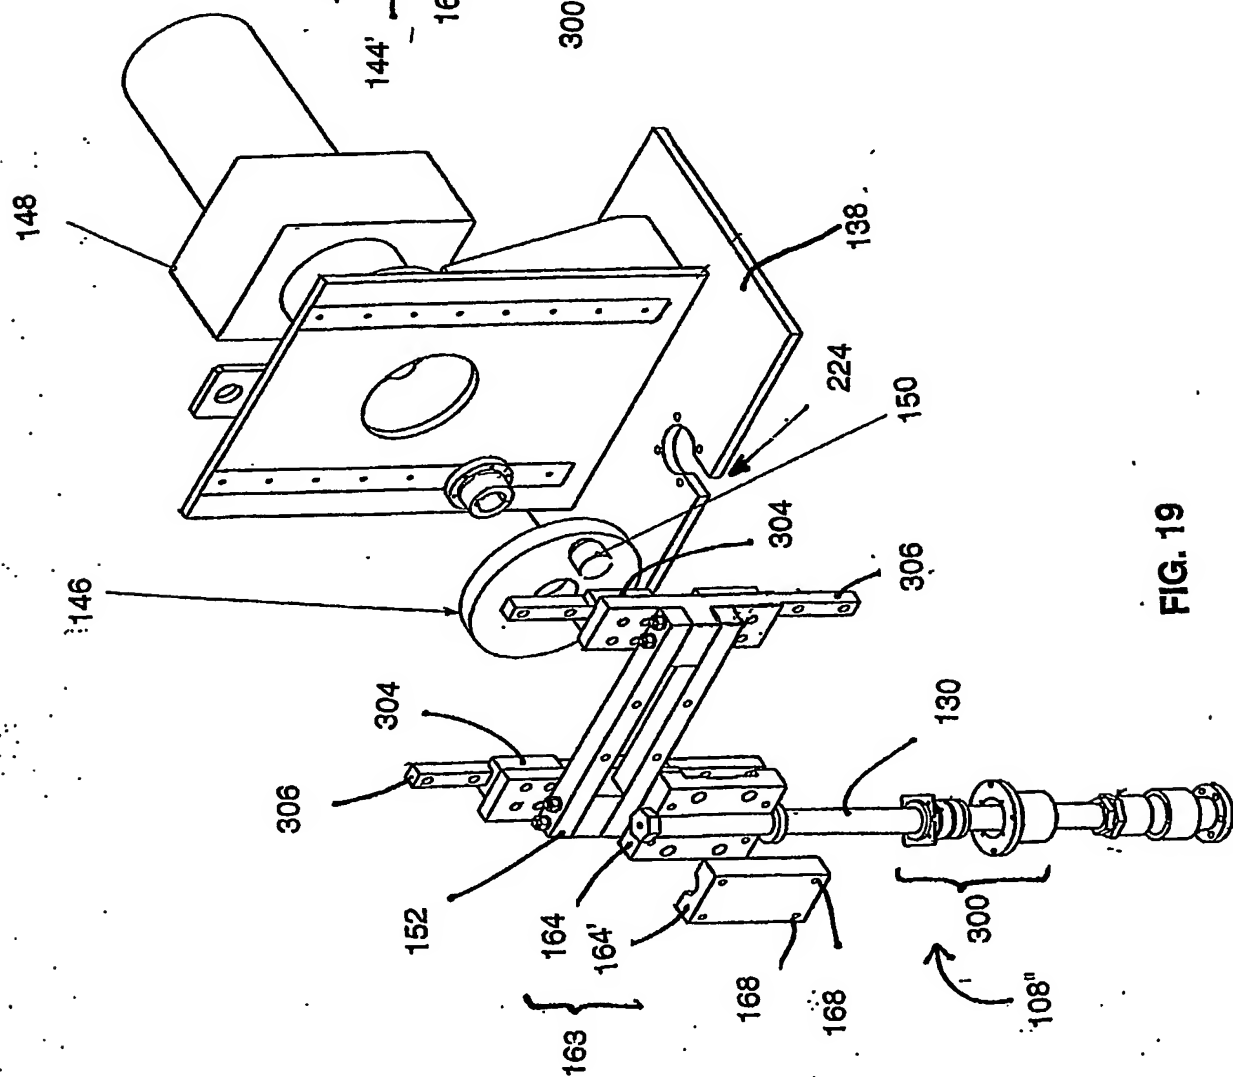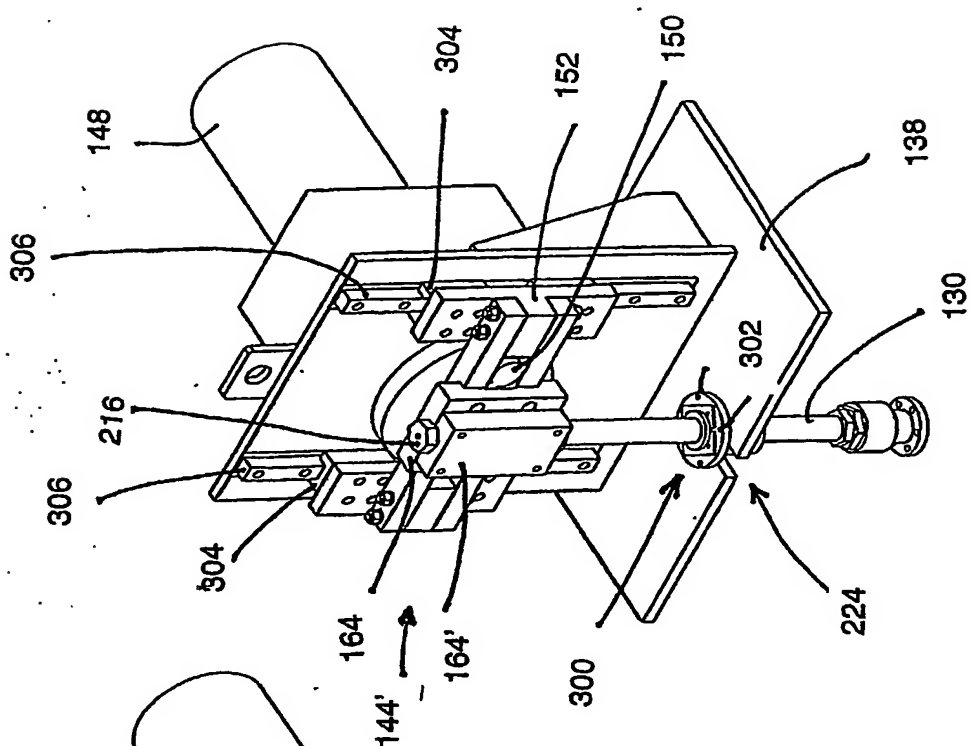

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**